


PowerDsine® POE430-AT Midspan

High Power 4-port Gigabit Midspan for the enterprise market

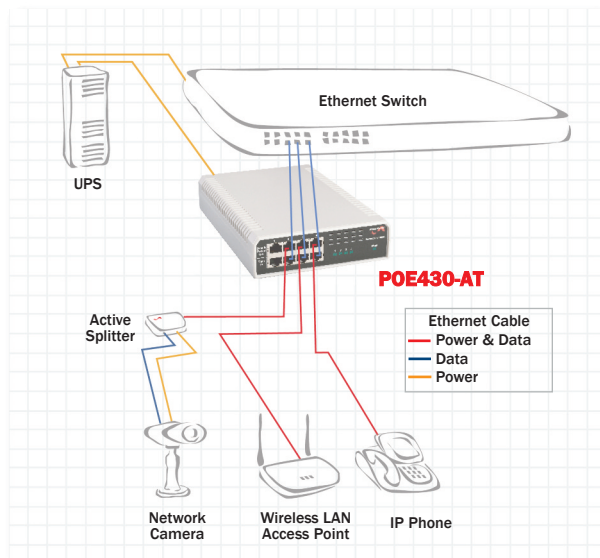

Overview

POE430-AT offers a cost effective, fully IEEE 802.3at compliant solution to upgrade existing infrastructure with PoE, guaranteeing 30 Watts of power through each port and ensuring safe operation of any standard PoE data terminal. It allows wireless LAN access points, security network cameras and IP terminals to receive power, along with data, over standard Ethernet cables, leaving network infrastructure completely unaltered.

POE430-AT Features

- A cost-effective solution to upgrade existing infrastructure to PoE
- Fully IEEE802.3at standard compliant
- Supports 10/100/1000Mbps data rates
- Safe & reliable power over existing Ethernet infrastructure
- Provides up to 30W per port for all ports
- 3 units can fit in 1U 19" rack
- Legacy PoE support

POE430-AT Specifications

No. of Ports	4
Pass Through Data Rates	10/100/1000Mbps
Power over Ethernet Output	Pin Assignment and Polarity: 4/5 (+), 7/8 (-) Output Power Voltage: 55Vdc User Port Power: 30W guaranteed
Input Power Requirements	AC Input Voltage: 90 to 264 Vac AC Input Current: 1.6A @ 110 Vac 0.8A @ 240 Vac AC Frequency: 50 to 60 Hz
Dimensions	148 mm x 224 mm x 43 mm 5.82 in. x 8.82 in. x 1.69 in
Weight	1.4 lbs (0.62 kg)
Indicators	System Indicator: AC Power (Green) User Indicator: Channel Power (Green)
Connectors	Shielded RJ-45, EIA 568A and 568B
Environmental Conditions	Operating Ambient Temperature: 32° to 104°F (0 to 40°C) Operating Humidity: Maximum 90%, Non-condensing Storage Temperature: -4° to 158°F (-20° to 70°C) Storage Humidity: Maximum 95%, Non-condensing Operating Altitude: -1000 to 10,000 ft. (-304.8 to 3048 m)
Reliability	MTBF: 150,000 hrs. @25°C
Thermal Rating	70 BTU/Hr (@240VAC)
Warranty	1-year
Regulatory Compliance	IEEE 802.3at (PoE), RoHS Compliant WEEE Compliant, CE
Electromagnetic Emission & Immunity	FCC Part 15, Class B EN 55022 Class B (Emissions) EN 55024 (Immunity), VCCI
Safety Approvals	UL/cUL Per EN 60950 GS Mark Per EN 60950

Ordering Information



Part Number	Name
POE430-ATEU	POE Midspan (EU)
POE430-ATUS	POE Midspan (US)

Description
4-port, 30W per port
4-port, 30W per port