

GV-NVR




INTRODUCTION

The software GV-NVR (Network Video Recorder) records audio and video over TCP/IP networks. With up to 32 IP surveillance channels, GV-NVR offers the same capabilities as the GV line of surveillance systems. With additional licenses, GV-NVR supports up to 32 channels of third-party IP devices. From monitoring capabilities to video analytics and integration with LPR, POS/ATM, and access control systems, this IP surveillance software is among the most comprehensive on the market.

When combined with GeoVision IP cameras, the GV-NVR benefits from superior image quality due to progressive scan technology and enables advanced video features such as unattended, missing object detection, and more. The compatibility of GV-NVR with an extensive range of third-party IP cameras via ONVIF makes it the ideal solution for IP surveillance environments.

GV Surveillance and Video Management Platform is the core system platform that provides performance-optimized video monitoring and various advanced video analytics features to support a variety of enterprise management functions. It is a scalable, extensible platform that can be tailored and integrated seamlessly with other security system applications, including:

1. POS/ ATM/ EAS for loss prevention
2. Access Control for facility automation
3. License Plate Recognition system for law enforcement, access control and revenue collection
4. Megapixel IP cameras for surveillance of critical areas and mobile objects
5. Central Monitoring Stations for high-profile security areas in commercial, industrial, and residential markets

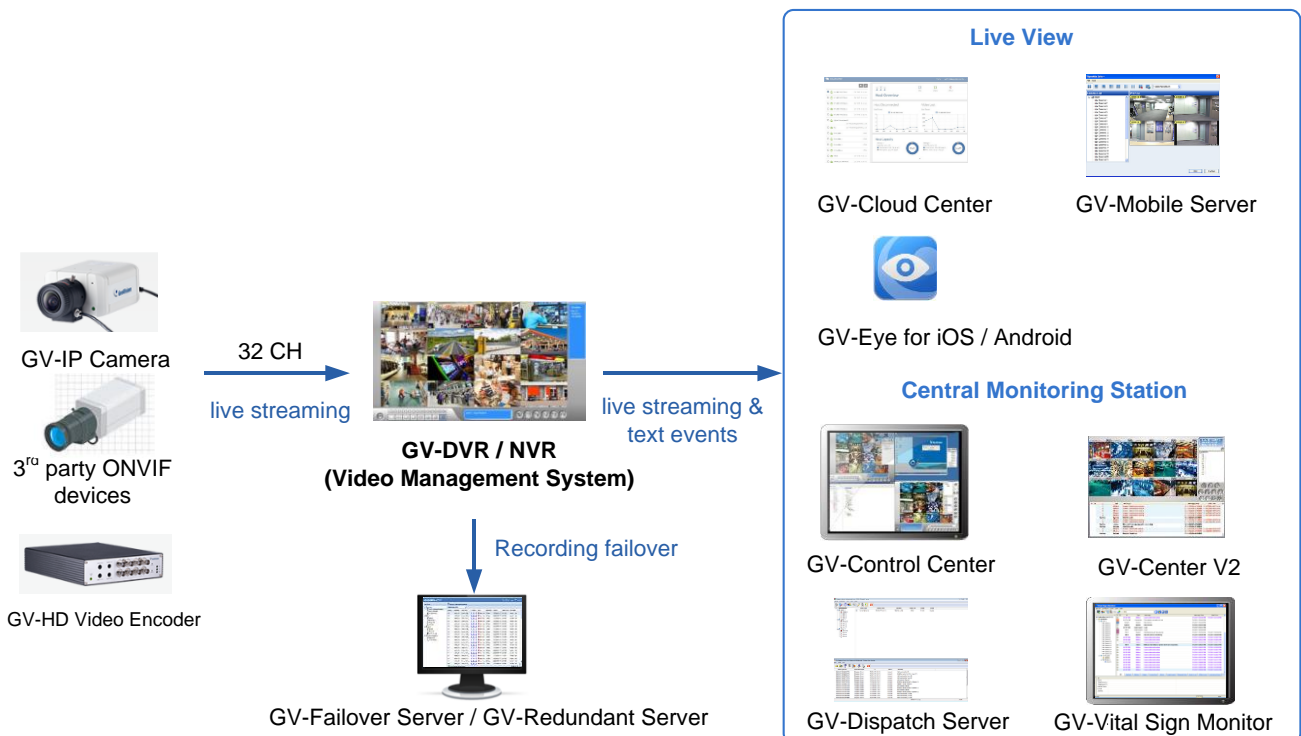

Key Feature List

▶ Monitoring

- Support for 32 channels in GV-System and CMS applications
- Support for GPU decoding
- Digital Matrix, support maximum 8 monitors display
- Hybrid Solution integrating analog videos with digital videos from GV-IP video products and third-party IP cameras (*1)
- Codecs: Geo H265, Geo H264, Geo MPEG4
- Multithreading Encoding (*1)
- Higher UI Screen Resolutions (1920 x 1200, 1680 x 1050, 1600 x 1200, 1280 x 800, 1440 x 900, 1920 x 1080 and 1280 x 1024)
- Noise Tolerance for Motion Detection
- Noise Detection to Reduce File Size (*1)
- Noise Filter to Filter Out Video and Audio Noise (*1)
- Report Generator
- Support for Cardholder data from GV-Video Server (GV-HD Video Encoder)
- Touch Screen Support
- Full screen view
- Dual display operation for live monitoring and ViewLog playback on two monitors
- Screen pop-ups on motion or alarm activation
- Advanced Motion Detection
- Digital watermark
- Video lost detection
- On screen video loss message
- Video de-interlace filter
- E-map
- Windows lockup
- Image size indicator
- Synchronized video and audio
- Backlight compensation
- Video auto gain controller (*1)
- Video scaling filter
- AVI repair utility
- System log
- Support 1,000 accounts for logins and passwords
- Multi level passwords protection
- Use Microsoft Remote Desktop to control another GV-System
- Twin DVR
- Embedded I/O devices control
- Embedded PTZ control panel
- Support dynamic IP address
- Password Expiration Management
- System Idle Protection
- Spot Monitor Controller
- POS Live Viewer
- Photo-ID Integration (GV-WT)
- Hard Disk Calculator (*1)
- Authentication Server
- Colorful Mode to enhance video color
- Live view buffer and frame rate control
- Wide Angle Lens Dewarping
- Dual stream on-demand display (*2)
- Fisheye GPU Dewarping (*2)
- 3rd party Fisheye Dewarping (*2)
- Support 3rd party IP Cameras - see IP Camera Support List (*2)
- Support ONVIF, PSIA, RTSP protocol (*2)

▶ Intelligent Recording & Playback

- Choice of recording at 30, 60, 120, 240, 480 and 960 fps (*1)
- Recording trigger by round-the-clock, motion detection, alarm and schedule
- Adjustable recording quality and frame rate for each camera
- Pre-motion and post-motion recording
- Supports Windows burning software
- Pre-Recording Using HDD
- Advanced Round-The-Clock Recording (*1)
- Instant Playback
- Time Merge from Different Clips
- Splitting Files for Backup onto Multiple Discs
- Extracting Frames from a Video Clip During Playback
- Support for Daylight Saving Time (DST)
- Playback of GPS tracks from GV-Compact DVR and GV-Video Server (GV-HD Video Encoder)
- Support for recording in standard type of H.264, MPEG4 and JPEG codec
- Support for saving dewarped fisheye view in AVI format
- Wide Angle Lens Dewarping
- Support for configuration change without stopping recording
- Compact Video files

▶ Audio

- 32 channels of live audio streaming and recording

▶ Video Analytics

- Object Counting
- People Counting
- Intrusion Alarm
- Face Detection
- Privacy Mask
- Unattended and Missing Object Detection
- Scene Change Detection
- Advanced Scene Change Detection
- Advanced Unattended Object Detection
- Advanced Missing Object Detection
- Advanced Motion Detection
- Panorama View
- Video Stabilization
- Defog Function
- Crowd Detection
- Object tracking and zooming by PTZ domes (*1)
- Object tracking in fisheye view
- Single PTZ Tracking
- Digital Object Tracking
- Face Count
- Camera Popup
- Video Lowpass filter

▶ **Smart Search & Ease Playback**

- Timeline Search
- Face Detection for Object Index
- Object search
- Index search
- Object Index
- Thumbnail browse for ease of search for specific frames within video footage
- Export a video footage within a specified time range

▶ **Notification**

- E-mail notification with attached video images on motion and alarm activation
- E-mail or telephone notification on video lost or I/O error
- Directs PTZ dome to a preset location on motion and alarm activation

▶ **WebCam - Remote Surveillance**

- POS Live View via IE Browser
- Support for connection with POS devices using OPOS and TCP/IP protocol
- 3G Mobile Phone Support (3GPP)
- SSL Encrypt Connection Support
- UPnP™ Support
- Control Panel on Single View to Provide Instant Information and Operation
- Support PIP, PAP, Defogging Live Videos, and Video Stabilizer in Single View

▶ **Advanced I/O Control**

- Visual Automation
- Virtual I/O Control
- One-Click I/O Status Control

▶ **Profile Management**

- Selectable GUI Skin
- Custom Start-Up Splash Screen, Non-Active Video & Video Lost Screen

▶ **Remote Monitoring Software**

- WebCam
- Remote Playback System
- Edge Recording Manager (Windows Version)

▶ **IT Technology**

- RSA Network Security
- Authentication Server: central control of password settings in local GV-DVRs

▶ **Central Monitoring Station (CMS)**

- [Center V2](#)
- [Vital Sign Monitor](#)
- [Dispatch Server](#)

▶ **Integration Solution**

- Point-Of-Sale
- EAS Integration
- Access Control

- Synchronized audio and video for both live and playback modes
- Continues playback of set frames A to B
- EXE format export, playable with any third-party players
- AVI format export in multiple screens mode
- DVD format export for Hybrid Card format files
- Option for recycling the input-triggered events (Never recycle function)

- SMS alerts available in Main System, Center V2 and Vital Sign Monitor
- Alarms on objects that pass between predefined regions

- Restricting Power User and User to Access WebCam Server at Specified Time Length
- Event List Query
- Download Center
- Drag-and-Drop Support for Camera, PTZ and I/O Icons on the 2 Windows of MPEG4 Encoder Viewer
- Remote E-Map
- Pop-up Live Images upon Input Trigger in Remote E-Map
- Multicast
- Audio Broadcast

- Multiple I/O Types Selection
- Latch Trigger Feature

- Customizing System Features
- Easy Configuration Backup & Restore
- Custom DVR Setting's Template

- Android Smartphones
- iPhone / iPod / iPad

- Authentication Server: Support for Windows Active Directory

- [Control Center](#)
- [GV-GIS \(Geographic Information System\)](#)

- Megapixel Integration
- Licence Plate Recognition
- Central Monitoring Station

Note:

(*1) Not supported by GV-NVR

(*2) Not supported by GV-DVR

GV-NVR Specifications

NVR		
Model	GV-NVR (GV)	GV-NVR
Video Input	32	1, 2, 4, 6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32
Audio Input	32	1, 2, 4, 6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32
Video Codec	MJPEG, MPEG4, H.264, H.265	
Audio Codec	16 kHz / 16 bit, 32 kHz / 16 bit	
Video Resolution	From CIF to 12 Megapixel	
Networking	LAN, WAN, Internet, Modem Dial-up, Modem-to-Modem, ISDN	
Backup Device	HDD, NAS, CD-R / R-W, DVD+R / +RW, DVD+R (DL), ZIP, JAZ, Blu-ray, GV-Storage System	
Language	Arabic / Bulgarian / Czech / Danish / Dutch / English / Finnish / French / German / Greek / Hebrew / Hungarian / Indonesian / Italian / Japanese / Lithuanian / Norwegian / Persian / Polish / Portuguese / Romanian / Russian / Serbian / Simplified Chinese / Slovakian / Slovenian / Spanish / Swedish / Thai / Traditional Chinese / Turkish	

Minimum System Requirements					
		GeoVision IP Camera	3rd-party IP Camera		
		Up to 32 Channels	1 - 4 Channels	5 - 8 Channels	Up to 32 Channels
OS	64-bit	Windows 10 / Server 2016			
CPU		2nd Gen Core i5, 3.3 GHz	2nd Gen Core i3, 3.1 GHz	2nd Gen Core i5, 3.3 GHz	2nd Gen Core i7, 3.4 GHz
RAM		8 GB Dual Channels			
VGA / Processor Graphics		HD Graphics 3000	HD Graphics 2000	HD Graphics 3000	
To obtain the maximum frame rate possible, please see the <i>GPU Decoding Specifications</i> below.					

Note:

1. GV-DVR / NVR / Hybrid DVR software has ended support for Windows 8.1 / 8 / 7 / XP / Vista / Server 2012 R2 / Server 2008 / Server 2008 R2.
2. H.265 decoding requires 6th Gen Intel Desktop Processor (Skylake) or above, which comes with onboard GPU.
3. The system requirements are determined in round-the-clock recording settings with live view only, while remote connections and video analysis features being disabled.

Licenses	
Free License	32 channels from GV-IP devices
Optional Paid License	32 channels from third-party IP devices
Increment for Each License	1 to 32 third-party IP cameras at an increment of 2
Optional Combinations	<ol style="list-style-type: none"> 1. GV-DVR / NVR / Hybrid DVR + GV-POS S/W Capture (with options of 4 serial POS and 32 network POS devices) 2. GV-DVR / NVR / Hybrid DVR + GV-POS Text Sender (with options of 1, 2, 4, 8, 12 and 32 ports) 3. GV-DVR / NVR / Hybrid DVR + GV-LPR Plugin
Dongle Type	Internal or external

Note: It is recommended to use internal GV-USB Dongle to have the Hardware Watchdog function which restarts the PC when Windows crashes or freezes.

Frame Rate Limit in a Single Hard Disk

Video resolution	H.264		H.265		MJPEG	
	Frame Rate	Bit Rate	Frame Rate	Bit Rate	Frame Rate	Bit Rate
12 MP	330 fps	14.47 Mbit/s	N/A	N/A	56 fps	65.98 Mbit/s
8 MP	550 fps	14.13 Mbit/s	N/A	N/A	96 fps	58.52 Mbit/s
5 MP	220 fps	16.48 Mbit/s	660 fps	6.73 Mbit/s	80 fps	30.4 Mbit/s
4 MP	330 fps	11.65 Mbit/s	550 fps	7.74 Mbit/s	105 fps	40.53 Mbit/s
3 MP	440 fps	10.48 Mbit/s	660 fps	5.35 Mbit/s	140 fps	38.67 Mbit/s
2 MP	660 fps	7.01 Mbit/s	N/A	N/A	210 fps	44.93 Mbit/s
1.3 MP	660 fps	5.05 Mbit/s	N/A	N/A	300 fps	32.26 Mbit/s

Note: The data above was determined using the bit rate listed above and hard disks with average R/W speed above 110 MB/s. The frame rate limit is based on the resolution of video sources. The higher video resolutions, the lower frame rates you can assign to a single hard disk. In other words, the higher frame rates you wish to record, the more hard disks you need to install. For the information of recording frame rates, you may consult the user's manual of the IP camera that you wish to connect to.

GPU Decoding Specifications

A higher total frame rate can be achieved if your CPU comes with onboard GPU.

Onboard GPU: GPU decoding is only supported when using the following Intel CPU:

For H.264 Video Compression

- 2nd Generation Intel Core i3 / i5 / i7 Desktop Processors (Sandy Bridge) - only support 1 MP to 2 MP videos
- 3rd Generation Intel Core i3 / i5 / i7 Desktop Processors (Ivy Bridge)
- 4th Generation Intel Core i3 / i5 / i7 Desktop Processors (Haswell / Haswell Refresh)
- 6th Generation Intel Core i3 / i5 / i7 Desktop Processors (Skylake)
- 7th Generation Intel Core i3 / i5 / i7 Desktop Processors (Kaby Lake)
- 8th Generation Intel Core i3 / i5 / i7 Desktop Processors (Coffee Lake)

For H.265 Video Compression

- 6th Generation Intel Core i3 / i5 / i7 Desktop Processors (Skylake)
- 7th Generation Intel Core i3 / i5 / i7 Desktop Processors (Kaby Lake)
- 8th Generation Intel Core i3 / i5 / i7 Desktop Processors (Coffee Lake)

Note: You can install multiple external graphic cards, but it is required to connect a monitor to the on-board VGA to activate H.264 / H.265 GPU decoding.

Total frame rate and number of channels supported

Refer to the documents below to see the total frame rate and number of channels supported by GV-NVR when connected to GV-Fisheye cameras and H.265 cameras.

- [GV-System V8.7 Supports H.265 GPU Decoding](#)
- [GV-Fisheye Camera Integration Notes](#)

Options

Optional Devices	Description
GV-Data Capture	GV-Data Capture unit allows the integration of POS systems and the GeoVision surveillance system through cable or network connection.
GV-IO Box Series	GV-IO Box series provides 4 / 8 / 16 inputs and relay outputs, and supports both DC and AC output voltages, with optional support for Ethernet module and 4E additionally supporting PoE connection.
GV-Joystick V2	GV-Joystick V2 facilitates PTZ camera control. It can be either plugged into the GeoVision surveillance system for independent use or connected to GV-Keyboard to empower the operation.

The final camera support list for GV-NVR V8.7.6 ~ V8.8.0 with Win 7

The final cameras supported by GV-NVR for **Windows 7** are listed below. If you want to use the newer GV-IP cameras, you must update your operating system to **Windows 10. V8.9.0 or later is only supported by Windows 10 or Server2016.**

- Bullet IP Camera (GV-ABL2701 / 2702 / 4701 / 4712 / 8712, BL2702-3V / 2702-4V / 2702-5V / 4702 / 4713 / 5713)
- Mini Fixed Rugged IP Dome (GV-ADR2701 / 4701)
- Target Eyeball Dome (GV-EBD2702 / 4711 / 8711)
- Target Bullet Camera (GV-EBL4711)
- Vandal Proof Dome (GV-AVD2700 / 4710 / 8710, VD2712 / 4702 / 4712 / 5702)
- Video Server (GV-VS2401 / 21600)
- OPAL Series (GV-OPAL E1)
- IR IP Speed Dome (GV-SD2723-IR / 2733-IR)
- IP Speed Dome (GV-SD2301 V2 / 2411 V2)

The latest cameras and devices supported by GV-NVR V8.9.1A

To integrate all of the following cameras and devices to GV-NVR V8.9.1A, it is required to install the [patch file](#).

- Box Camera (GV-BX-2802 / 4802)
- Box Camera – Face Detection (GV-BX2700-FD / 4700-FD / 8700-FD)
- Bullet IP Camera (GV-TBL2703 series / 2705 / 4703 / 4705 / 4710 / 4711 / 4807 / 4810 / 8710 / 8804 / 8810, BLFC5800, TBLP5800)
- Bullet IP Camera – Face Detection (GV-BL8714-FD)
- Eyeball IP Dome (GV-EBD2704 / 4704 / 4813 / 8700 / 8800 / 8813, EBFC5800, EBDP5800)
- Fisheye Camera (GV-FER5701 / 5702 / 12700)
- Fixed IP Dome – Face Recognition (GV-FD8700-FR)
- IP LPR Camera (GV-LPR2800-DL / 2811-DL)
- IR IP Mini PTZ Camera (GV-PTZ5810-IR)
- Mini Fixed IP Dome (GV-TFD4700 / 4800)
- Mini Fixed Rugged IP Dome (GV-ADR2702 / 4702, TDR2702 / 2704 / 4700 / 4702 / 4704 / 4803 / 8805)
- Motorized IP Dome – Face Detection (GV-MD8710-FD)
- Speed Dome Camera (GV-QSD5730-Outdoor / QSD5731-IR, SD4834-IR / SD4825-IR)
- Vandal Proof Dome (GV-TVD4710 / 4810 / 4811 / 8710)
- IR Thermal & Optical Fixed Eyeball Dome (GV-TMEB5800)
- Panoramic Fixed IP Bullet (GV-PBL8800)
- Panoramic Fixed Rugged IP Dome (GV-PDR8800)