


## DS-2CD2232-I5

### 3 MP EXIR Bullet Network Camera


EXIR

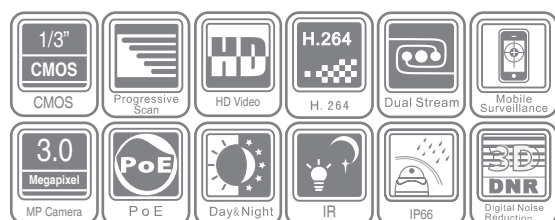

#### Key Features

- Full HD1080p Real-Time Video
- 3.0 Megapixel (2048 x 1536) Resolution
- DWDR, 3D DNR, and BLC
- EXIR Illuminators: Up to 50 Meters
- IP66
- PoE

#### Dimensions

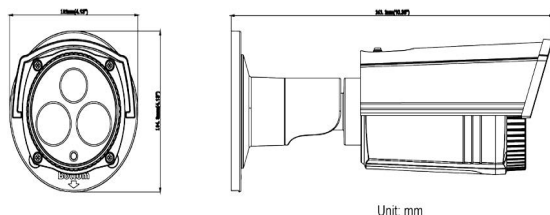

#### Accessories



#### Order Models

DS-2CD2232-I5

| DS-2CD2232-I5               |                                                                                           |
|-----------------------------|-------------------------------------------------------------------------------------------|
| <b>Camera</b>               |                                                                                           |
| Image Sensor                | 1/3" progressive scan CMOS                                                                |
| Minimum Illumination        | 0.19 lux @ f/2.0, AGC on 0 lux with IR                                                    |
| Shutter Speed               | 1/25 s (1/30 s) to 1/100,000 s                                                            |
| Lens                        | 4 mm @ f/2.0 (6 mm, 12 mm options) angle of view: 75.8°                                   |
| Lens Mount                  | M12                                                                                       |
| Day/Night                   | ICR                                                                                       |
| Digital Noise Reduction     | 3D DNR                                                                                    |
| Wide Dynamic Range          | Digital WDR                                                                               |
| Backlight Compensation      | Yes, zone configurable                                                                    |
| <b>Compression Standard</b> |                                                                                           |
| Video Compression           | H.264/MJPEG                                                                               |
| H.264 Compression Profile   | Main Profile                                                                              |
| Bit Rate                    | 32 Kbps to 16 Mbps                                                                        |
| Dual Stream                 | Yes                                                                                       |
| <b>Image</b>                |                                                                                           |
| Maximum Image Resolution    | 2048 x 1536                                                                               |
| Frame Rate                  | 60 Hz: 15 fps (2048 x 1536), 30 fps (1920 x 1080), 30 fps (1280 x 720)                    |
| Image Settings              | Saturation, brightness, contrast adjustable through client software or Web browser        |
| <b>Network</b>              |                                                                                           |
| Network Storage             | NAS                                                                                       |
| Alarm Triggers              | Motion detection, tampering alarm                                                         |
| Protocols                   | TCP/IP, HTTP, DHCP, DNS, DDNS, RTP, RTSP, PPPoE, SMTP, NTP, SNMP, HTTPS, FTP, 802.1X, QoS |
| System Compatibility        | ONVIF, PSIA, CGI, ISAPI                                                                   |
| General Functionalities     | User authentication, watermark                                                            |
| <b>Interface</b>            |                                                                                           |
| Communication Interface     | 1 RJ-45 10M/100M Ethernet port                                                            |
| <b>General</b>              |                                                                                           |
| Operating Conditions        | -30° C to 60° C (-22° F to 140° F), humidity 95% or less (non-condensing)                 |
| Power                       | 12 VDC ±10%, PoE (802.3af)                                                                |
| Power Consumption           | Maximum 7 W (9 W with ICR on)                                                             |
| Ingress Protection          | IP66                                                                                      |
| EXIR Range                  | Up to 50 meters                                                                           |
| Dimensions                  | 100.5 mm x 88.1 mm x 157.3 mm (3.96" x 3.47" x 6.19")                                     |
| Weight                      | 700 g (1.5 lbs)                                                                           |