

# HIKVISION

## DS-K4H250-U: U-Bracket for DS-K4H250/D

### General Information/Key Features

- Door Opens at the angle of 90°
- Suitable for Frameless Glass Door
- Shell is Hard Anodizing Electroplating Operated

### Related Pages (Right click to open in new tab)

**Shop Now.** Visit the [DS-K4H250-U](#) product page for detailed information

View [other Hikvision U-Brackets for DS-K4H250/Ds](#)

View over 1300 [video surveillance products from Hikvision](#)

**Scroll down** to view the Hikvision DS-K4H250-U specification sheet



**HIKVISION**  
DS-K4H250-U

<https://www.surveillance-video.com> is a distributor/reseller of over 120,000 security products from over 100 brands.

For over 45 years, we have earned the confidence of our customers by providing professional service and support.

If you need technical support or assistance to install your security system or any other products purchased from Surveillance-video.com, you can call us @ 800-955-5201 at any time.

# Mounting Bracket

## Accessories of Magnetic Lock

### DS-K4H250-LZ

### LZ-Bracket of Magnetic Lock, for DS-K4H250S/D


- The LZ-bracket adopts aldural material with the surface sandblast;
- It is suitable for in-swing doors;
- The door opens towards inside at the angle of 90°;
- The bracket is suitable for magnetic lock of 300kg series;
- The shell is hard anodizing electroplating operated;
- The weight of the bracket is 0.75kg (1.58lb);
- The dimension(L×W×H) of L-bracket is 250×47×28.5mm (9.84×1.85×1.12");
- The dimension (L×W×H) of Z-bracket is 180×50×50mm (7.09×1.97×1.97") (ABK-280ZL).




### DS-K4H250-LZ

### Installation

- For in-swing door, install the lock body inside and then need to install the ZL bracket at the same time.
- Discharge the mounting plate from lock body.
- Fix the L bracket on the door frame and then fix the lock body on the L bracket.
- Assemble the Z bracket and then fix it on the door frame
- Fix the armature plate on the Z bracket



Swing in installation

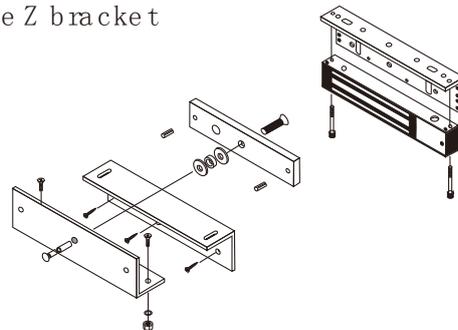

**DS-K4H250-U**


**U-Bracket of Magnetic Lock, for DS-K4H250/D**

- The U-bracket adopts aldural material with the surface sandblast;
- It is suitable for frameless glass door;
- The door opens at the angle of 90°;
- The U-bracket is suitable for magnetic lock of 300kg series;
- The shell is hard anodizing electroplating operated;
- The thickness of glass should be 10 to 15mm;
- The weight of the U-bracket is 0.32kg (0.70lb);
- The dimension (L×W×H) of U-bracket is 180×40×28mm (7.09×1.57×1.10").




**DS-K4H250-U**

**Installation**

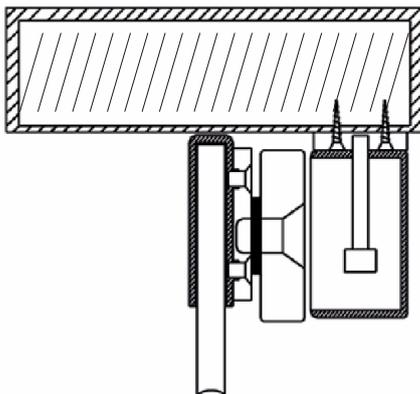

Pull glass door leaf(swing out)

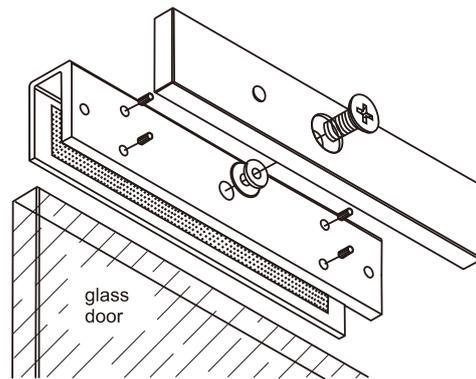

U Bracket Installation

- If the door is glass door, need to install the U bracket.
- Use the Allen key to fix the U bracket on the glass door.
- Fix the amature plate on the U bracket.

