



Solar Powered Panel with Mounting Hardware

SXC600


(6) 100W solar panels, enclosure, 4G router*, charge controller, PoE switch

Features

- 1 Solar panel and mounting hardware included
- 2 Weather-proof aluminum enclosure and mounting hardware included
- 3 Lockable wing-knob; locks with pad lock (pad lock not included)
- 4 Hardwired PoE switch, converters, charging equipment, and 4G Powered by Cradlepoint Router are self-contained and safeguarded against environmental factors and tampering
- 5 Battery capacity of up to 4 x 100 Ah batteries

*SIM card not included

Network Operator Certifications: AT&T®, T-Mobile®, Verizon®

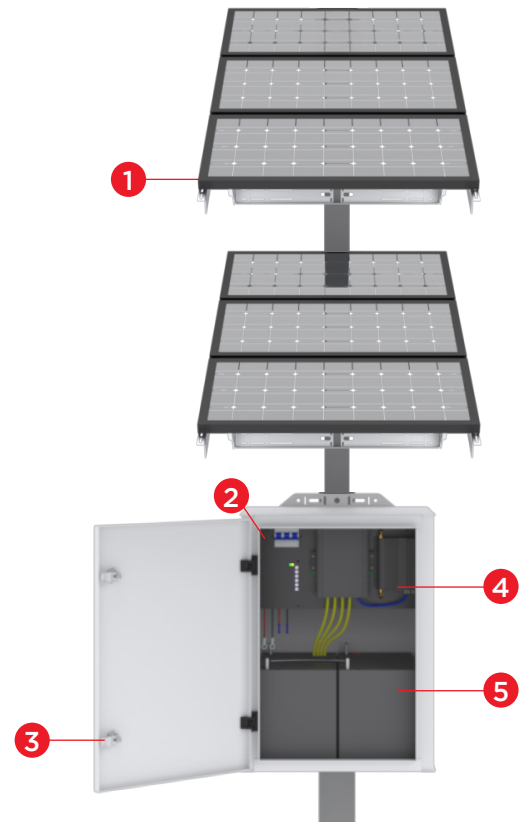


Solar Panel Specifications

Number of Panels	(6) 100W
Individual Panel Dimensions	40"(L) x 27"(W)
Panel Weight	120 lbs.
Recommended Pole Size	3" - 6" schedule 40 rigid metal or stronger (straps not included)
Wind Rating	100 mph
Output Voltage	Up to 4x PoE IP cameras - total 120W
Solar Charge Controller	Advanced charge control with max power point tracking (MPPT) algorithm

Enclosure Specifications

Enclosure Size	32"(H) x 24"(W) x 16"(D)
Battery Capacity	(4) 100Ah batteries (not included)
100Ah Battery Size*	9.2" (H) x 12.3" (W) x 6.7"(D)
Enclosure Weight	38 lbs.
Pole Size	3" - 6" schedule 40 rigid metal or stronger (straps not included)
Material	Aluminum
Operating Temperature	-40°F - 140°F

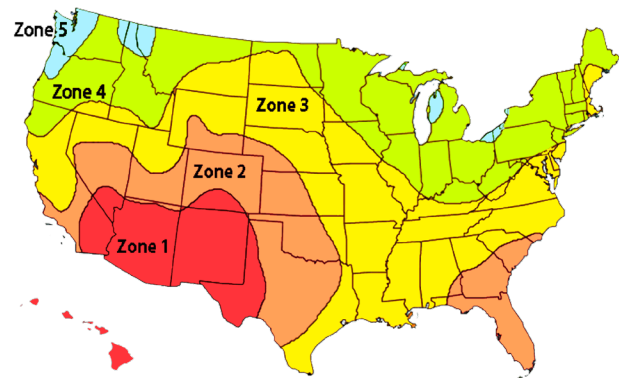

Zone Key

Remaining Wattage for Camera Use					
Most Sunlight  Least Sunlight					
Solar Array Size	Zone 1	Zone 2	Zone 3	Zone 4	Zone 5
600W	74W	59W	41W	23W	N/A

Speco Technologies® is constantly developing and improving products. We reserve the right to modify product design and specifications without notice and without incurring any obligation.
Revised 7/31/25

802.3 af - up to 15.4W
802.3 at - up to 25.5W
Not recommended for Alaska or Canada