



4MP IP Turret Camera with White Light Intensifier

O4KT1

2.8mm fixed lens, white housing

Features

- Supports up to 4MP @ 20fps
- Full Color Capture in Day & Night with White LED
- H.265/H.264 compression supported
- Built-in standard PoE (IEEE 802.3af)
- True Day/Night operation (IR cut filter)
- IR range: 98 ft. (depending on scene reflection)
- MicroSD card slot up to 256GB max (card not included)
- Built-in Microphone
- IP67 weather resistance
- 5 year warranty

NDA COMPLIANT ONVIF® | GST



Camera Specifications

Image Sensor	Progressive scan 1/3" CMOS, 4MP
Maximum Resolution	2560 x 1440 (4MP)
Field of View	98° (H), 53° (V), 111°(D)
Minimum Illumination	0.07 lux @ F.20, AGC ON; 0 lux with IR
Image Settings	Region of interest, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Defog, Sharpen, Noise Reduction
Day/Night	Smart IR up to 100' (depending on scene reflection) DWDR, BLC, HLC
Compensation	1/3 - 1/1000000 sec.
Electronic Shutter Speed	3D DNR
DNR	Pan 0°-360°, Tilt 0°-75°, Rotation 0°-360°
Angle Adjustment	

Video Specifications

Main Resolution	2560x1440 @ 20fps
Sub stream Resolution	720p (1-15fps), D1, CIF (1-30fps)
Compression	H.265, H.264
Bitrate Control	VBR, CBR (64Kbps - 5Mbps)
Multiple Streaming	2 streams

Audio Specifications

Audio Compression	G.711A / G.711U
-------------------	-----------------

Network Specifications

Protocols	UDP, IPv4, IPv6, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, 802.1x, UPnP, HTTP, HTTPS, QoS
DDNS support	Speco DDNS (free of charge)
Security	User ID & Password protection, IP/Mac address filtering, digest authentication
User Access	Max. 4 simultaneous users

Interfaces

Ethernet	RJ45 Jack
Power	DC Jack
Audio In	Built-in Microphone
Audio Out	No
Card Slot	MicroSD, up to 256GB (not included)
Alarm	No
In/Out Reset	Yes

Client Specifications

Web Browser Support	Google Chrome®, Microsoft Edge®, Internet Explorer®, Apple Safari®, Firefox®
PC	Speco Blue VMS
Mobile	Speco Blue (iPhone® and Android™)

System Specifications

PoE	Standard (IEEE 802.3af)
Alert Triggers	Motion, Detection Events, SD card error
Image Settings	Watermark, IP address filtering, video mask, password protection, Corridor mode
Analytics	Line Crossing, Region Intrusion, Human Detection


Dori Distance

Lens	Detect	Observe	Recognize	Identify
2.8mm	58m(190ft)	23m(76ft)	12m(38ft)	6m(19ft)

Operating & Unit Specifications

Power	PoE,12VDC(power supply not included)
Power Consumption	6W
Operating Temperature	-22°F ~ 140°F
Temperature	Less than 95 % (non-condensing)
Operating Humidity	4.2" (Dia.) x 3.75" (H)
Unit Dimensions Unit	1.0 lb.
Weights Certifications	FCC

Camera Interfaces

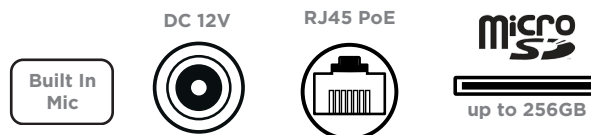

Optional Accessories



PSW5
12VDC
Power Supply



CMT1
Corner Mount



PMT1
Pole Mount



JB3
Junction Box



WMT1*
Wall Mount



CLT3*
Ceiling Mount
*Requires JB3



CLTX1
Ceiling Mount
4" Extension



CLTX2
Ceiling Mount
8" Extension