

NetWay2ES

PoE-Powered 2-Port PoE+ Switch



Altronix NetWay2ES PoE-powered 2 port PoE/PoE+ switch is designed for installation at the IDF (Intermediate Distribution Frame) to deploy IP devices. NetWay2ES allows for system expansion by accommodating up to two (2) IP cameras/devices over a single CAT5 or higher structured cable. PoE is passed from a midspan injector, typically located at the MDF (Main Distribution Frame).



NetWay2ES

Key Features

- Remote installation and powering of up to two (2) PoE+ cameras/devices
- Two (2) IEEE 802.3af, 802.3at compliant PoE output ports
- PoE Input: IEEE 802.3bt compliant
- 30W maximum power per output port (60W total)
- Powered by any PoE midspan/endspan
- Data rate: 10/100 Base-T
- Input and output port status LEDs
- Auto detection and protection of legacy non-PoE cameras/devices
- Can be wall or shelf mounted
- CE European Conformity
- Lifetime Warranty

Specifications

Ethernet Input

802.3bt PoE up to 90W or 802.3at up to 30W or 802.3af up to 15W

Ethernet

2-PoE+ ports, IEEE 802.3af and 802.3at compliant
Connectivity: RJ45, auto-crossover
Wire type: 4-pair CAT5e or better structured cable
Distance: up to 100m
Speed: 10/100BaseT, half/full duplex, auto negotiation

Indicators (LED)

Yellow and Green LED (by RJ45 jack):
IP Link status, 10/100Base-T/active
Green LED:
Input/Output PoE on

Agency Listings

CE European Conformity

Physical and Environmental

Dimensions (W x L x H)

Enclosure: 3.5" x 3.5" x 1" (88.9mm x 88.9mm x 25.4mm)

Shipping: 8" x 6" x 5" (203.2mm x 152.4mm x 127mm)

Weight (approx.)

Product: 0.25 lb. (0.11 kg)

Shipping: 0.42 lb. (0.19 kg)

Temperature

Operating: - 40°C to 75°C (- 40°F to 167°F)

Storage: - 40°C to 75°C (- 40°F to 167°F)

Relative Humidity 85% +/- 5%

Operating Altitude - 304.8 to 2,000m


Lifetime Warranty

NetWay2ES

PoE-Powered 2-Port PoE+ Switch



Typical Application

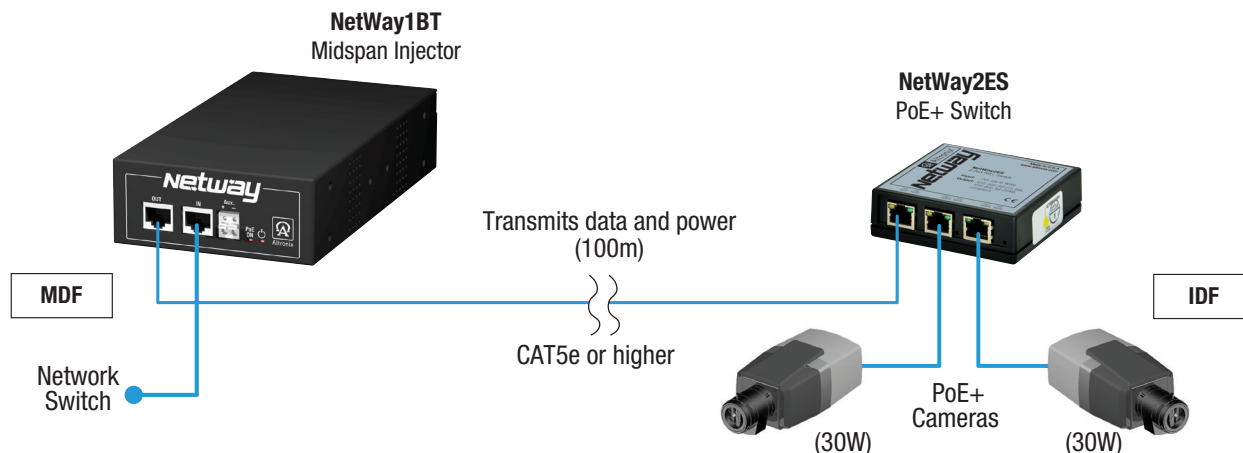

Accessories (order separately)



NetWay1BT

NetWay1BT - Single Port 802.3bt Midspan Injector for Standard and Enhanced Power Network Infrastructure

Provides PoE (15W), PoE+ (30W), and 802.3bt PoE (90W)
CE European Conformity



NetWaySP1BT

NetWaySP1BT - Single Port 802.3bt Media Converter/Injector

Provides PoE (15W), PoE+ (30W), and 802.3bt PoE (90W)
Data over SFP port or Ethernet
CE European Conformity



DCL2

DCL2 - DIN Rail Mounting Clip

Allows for easy installation of Altronix adapters utilizing screw mounting holes to mount on a standard DIN rail (Altronix Din Rail models D10, D12, D19, or D24).

Similar products:



NetWay2ESWPN

NetWay2ESWPN

2-Port PoE+ Switch mounted in NEMA 4/4X IP66-11 outdoor enclosure.

Lifetime Warranty