



Bullet Network Camera IP8365H/65EH

2MP • WDR Pro • 30M IR • Smart IR •
3DNR • Smart Focus System • IP67 • Corridor View

VIVOTEK IP8365H/65EH are professional outdoor bullet network cameras offering up to 60 fps @ 2-Megapixel resolution with superb image quality.

Featuring the Wide Dynamic Range Technology WDR Pro, it provides improved visibility in the extremely dark & light environment. Combined with 3D Noise Reduction Technology, which enables the IP8365H/65EH to capture clear, polished video under low-light conditions and reduce bandwidth from sensor noise, users can identify an increased level of image details in pretty bright as well as dark environments.


Additionally, as a professional day/night camera, IP8365H/65EH adopt a Smart IR technology which prevents overexposure and provides noise reduction to adjust the IR lighting intensity instantaneously based on the changes of light in the ambient environment.

To provide top-notch image quality, IP8365H/65EH also come with a P-iris lens, which controls the iris with extreme precision with its built-in stepper motor. By using software controls, the lens maintains the iris opening at an optimal level at all times, resulting in superior sharpness and depth of field as well as image quality. Furthermore, for installers, properly adjusting the focus of a megapixel network camera can be difficult due to the level of image detail. Therefore, IP8365H/65EH are also designed with VIVOTEK's Smart Focus System to make installation and adjustment easier by using remote focus and zoom adjustment.


The camera's IP67-rated housing is designed to protect the camera body from being immersed in the water, even against the immersion at the depth of at least 1m. Additionally, the wide temperature range further enhances the IP8365EH performance and reliability in extremely cold and hot weather.

Features

- 2-Megapixel CMOS Sensor
- 30 fps @ 1920x1080
- 60 fps @ 1920x1080 (one-stream mode only)
- Motorized P-iris Lens
- Removable IR-cut Filter for Day & Night Function
- Built-in IR Illuminators, Effective up to 30 Meters
- Smart IR Technology to Avoid Overexposure
- 3D Noise Reduction for Low-light Conditions
- WDR Pro (100dB) to Provide Improved Visibility in Extremely Bright or Dark Environments
- Smart Focus System for Remote and Precise Focus Adjustment
- Two-way Audio
- Weather-proof IP67-rated Housing
- Video Rotation for Corridor View
- EIS (Electronic Image Stabilization) to Control Image Stability
- Extreme Weather Support (IP8365EH)



Lobby



Low Light




Bank



Arctic Weather

Technical Specifications

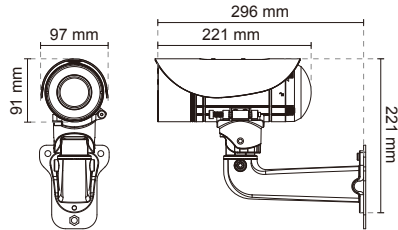Model	IP8365H/65EH	Alarm and Event	
System Information		Alarm Triggers	Video motion detection, manual trigger, digital input, periodical trigger, system boot, recording notification, camera tampering detection
CPU	Multimedia SoC (System-on-Chip)	Alarm Events	Event notification using digital output, HTTP, SMTP, FTP and NAS server File upload via HTTP, SMTP, FTP and NAS server
Flash	256 MB	General	
RAM	384 MB	Smart Focus System	Remote focus
Camera Features		Connectors	RJ-45 for Network/PoE connection Audio input/output TV output AC 24V power input DC 12V power input Digital input*1 Digital output*1
Image Sensor	1/2.8" Progressive CMOS	LED Indicator	System power and status indicator
Maximum Resolution	1920x1080 (2MP)	Power Input	DC12V/AC24V IEEE 802.3af PoE
Lens Type	Vari-focal, Remote Focus	Power Consumption	
Focal Length	f = 3 ~ 9 mm	Power Consumption	IP8365H: DC Max. 11 W AC Max. 24.4 W PoE Max. 11 W
Aperture	F1.2 ~ F2.3		IP8365EH: DC Max. 30 W (Heater on), 8 W (Heater off) AC Max. 30 W (Heater on), 8.8 W (Heater off) PoE Max. 11 W (Heater off)
Auto-iris	P-Iris		
Field of View	39° ~ 89° (Horizontal) 22° ~ 49° (Vertical) 44° ~ 103° (Diagonal)		
Shutter Time	1/5 sec. to 1/10,000 sec.	Dimensions	Ø: 91mm x 221mm
WDR Technology	WDR Pro	Weight	Body only Net: 1,314g (IP8365EH), 1,270g (IP8365H) With stand and sunshield Net: 1,911g (IP8365EH), 1,867g (IP8365H)
Day/Night	Removable IR-cut filter for day & night function Smart IR Technology to avoid overexposure	Casing	Weather-proof IP67-rated housing
Minimum Illumination	0.11 Lux @ F1.2 (Color) 0.001 Lux @ F1.2 (B/W) 0 Lux (IR ON)	Safety Certifications	CE, LVD, FCC Class A, VCCI, C-Tick, UL
Pan/tilt/zoom	ePTZ:	Operating Temperature	IP8365H: Starting Temperature: -10°C ~ 50°C (14°F ~ 122°F) Working Temperature: -20°C ~ 50°C (-4°F ~ 122°F) IP8365EH: PoE Working Temperature: -10°C ~ 50°C (14°F ~ 122°F) Cold Startup Temperature: -10°C (14°F) DC12V/AC24V Working Temperature: -50°C ~ 50°C (-58°F ~ 122°F) Cold Startup Temperature: -40°C (-40°F)
Functionalities	48x digital zoom (4x on IE plug-in, 12x built in)	Warranty	36 months
IR Illuminators	Built-in IR illuminators, effective up to 30 meters IR LED*4, with Smart IR Technology	System Requirements	
On-board Storage	SD/SDHC/SDXC card slot	Operating System	Microsoft Windows 8/7/Vista/XP/2000
Video		Web Browser	Mozilla Firefox 7~10 (streaming only) Internet Explorer 7/8/9/10/11
Compression	H.264, MJPEG	Other Players	VLC: 1.1.11 or above Quicktime: 7 or above
Maximum Frame Rate	30 fps @ 1920x1080 60 fps @ 1920x1080 (one-stream mode only) In both compression modes	Included Accessories	
Maximum Streams	2 simultaneous streams	CD	User's manual, quick installation guide, Installation Wizard 2, ST7501 32-channel recording software
S/N Ratio	62dB	Others	Quick installation guide, warranty card, sun shield, wall mount bracket, waterproof RJ45 Ethernet enclosure, alignment sticker, desiccant bag, waterproof connector
Dynamic Range	100dB	Dimensions	
Video Streaming	Adjustable resolution, quality and bitrate		
Image Settings	Time stamp, text overlay, flip & mirror configurable brightness, contrast, saturation, sharpness, white balance, exposure control, gain, backlight compensation, privacy masks, scheduled profile settings, 3D noise reduction, EIS, video rotation		
Audio			
Audio Capability	Two-way audio (full duplex)		
Compression	AAC, G.711, G.726		
Interface	External microphone input Audio output		
Network			
Users	Live viewing for up to 10 clients		
Protocols	IPv4, IPv6, TCP/IP, HTTP, HTTPS, UPnP, RTSP/RTP/RTCP, IGMP, SMTP, FTP, DHCP, NTP, DNS, DDNS, PPPoE, CoS, QoS, SNMP, 802.1X, UDP, ICMP		
Interface	10Base-T/100BaseTX Ethernet (RJ-45) *It is highly recommended to use standard Cat. 5e & Cat. 6 cables which are compliant with the 3P/ETL standard.		
ONVIF	Supported, specification available at www.onvif.org		
Intelligent Video			
Video Motion Detection	Triple-window video motion detection		

Compatible Accessories

Mounting Kits



AM-311
Pole Mount Adaptor



AM-411
Corner Mount Adaptor



AM-711
Junction Box

All specifications are subject to change without notice. Copyright © VIVOTEK INC. All rights reserved.

Distributed by:

VIVOTEK INC.
6F, No.192, Lien-Cheng Rd., Chung-Ho,
New Taipei City, 235, Taiwan, R.O.C.
T: +886-2-82455282 F: +886-2-82455532
E: sales@vivotek.com

VIVOTEK USA
2050 Ringwood Avenue,
San Jose, CA 95131
T: 408-773-8686 F: 408-773-8298
E: salesusa@vivotek.com

VIVOTEK Europe
Randstad 22-133, 1316BW Almere,
The Netherlands
E: saleseurope@vivotek.com

Ver 2.1