

# In tructions

**Rack Mount Bracket** 

Before attempting to mount this product, please read these instructions carefully and save this manual for future use.

Model Nos. WV-Q204/1S WV-Q204/2S

These Rack Mounting Brackets are used for mounting such as the WJ-NT304, etc.

## **INSTALLATIONS**


The installation described below should be made by qualified service personnel or system installers. **Important:** Recommended tightening torque is M3: 0.78 N·m (8 kgf·cm).

### ■ Mounting in a Rack

WV-Q204/1S can mount the WJ-NT304 on the rack. WV-Q204/2S can mount side by side up to two WJ-NT304S on the rack.


Illustrations as shown below are examples to install WJ-NT304 and WJ-NT304S.

1. Remove the four rubber feet from the bottom of the WJ-NT304.



#### Mounting one WJ-NT304 with the WV-Q204/1S

2. Fix the mounting brackets (large and small) on both sides of the WJ-NT304 with the eight supplied screws (M3x8) as shown below.

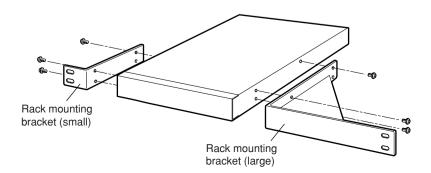



#### Mounting two WJ-NT304 with the WV-Q204/2S


2. Place the joint metals on the WJ-NT304S as shown below and fix them with the supplied screws (M3x6) Note: Remove two screws from the rear of the WJ-NT304 beforehand.

Fix the mounting brackets (small) on both sides of the Joint metal Remove 2 screws from WJ-NT304S with the eight supplied screws (M3x8) as shown the rear beforehand. Rack mounting bracket (small) Rack mounting bracket (small)

3. Install the WJ-NT304S with the rack mounting brackets in the rack by using four screws (not included).

#### **Cautions:**

- Do not block the ventilation opening or slots in the cover to prevent the appliance from overheating. Always keep the temperature in the rack within +45°C (113°F).
- · Secure the rear of the appliance to the rack by using additional mounting brackets (procured locally) if the rack is subject to vibration.



## STANDARD ACCESSORIES

WV-Q204/1S: Mount Screw Binding head (M3 x 8) ...... 8 pcs.

Specifications are subject to change without notice.

WV-Q204/2S: Mount Screw Binding head (M3 x 8) ...... 8 pcs. Flat head (M3 x 6) ...... 12 pcs.

For further informations, refer to Operating Instructions of System Unit.

When install the unit except CCTV system unit, use supplied tapping screws.

#### For U.S., Canadian and Puerto Rican fields:

Panasonic System Solutions Company, Unit Company of Panasonic Corporation of North America Security Systems www.panasonic.com/security

For customer support, call 1.877.733.3689

Executive Office: Three Panasonic Way 2H-2, Secaucus, New Jersey 07094

Zone Office

Eastern: Three Panasonic Way, Secaucus, New Jersey 07094 Central: 1707 N. Randal Road, Elgin, IL 60123 Southern: 1225 Northbrook Parkway, Suwanee, GA 30024 Western: 6550 Katella Ave., Cypress, CA 90630

Panasonic Canada Inc.

5770 Ambler Drive, Mississauga, Ontario, L4W 2T3 Canada (905)624-5010 http://www.panasonic.ca

Panasonic Sales Company

Division of Panasonic Puerto Rico Inc. San Gabriel Industrial Park 65th Infantry Ave. KM. 9.5 Carolina P.R. 00985(809)750-4300

For European and other fields:

#### Matsushita Electric Industrial Co., Ltd.

Osaka, Japan http://panasonic.net

© 2007 Matsushita Electric Industrial Co., Ltd. All Rights Reserved.