

4CH Compact PoE NVR

SRN-472S

4CH NVR with PoE Switch

- Up to 32Mbps network camera recording
- Easy camera installation via dedicated 4 PoE ports
- Up to 5megapixel IP camera supported
- Max 2 internal HDDs (Max 8TB, Over 2-months @2MP)
- Alarm, MD & VA event recording & search
- Support Samsung viewers (iPOLiS mobile, SmartViewer)



4CH NVR with PoE Switch SRN-472S




Retail

A1 SECURITYCAMERAS
The First Name in Security



Dimensions

Unit : mm (inch)

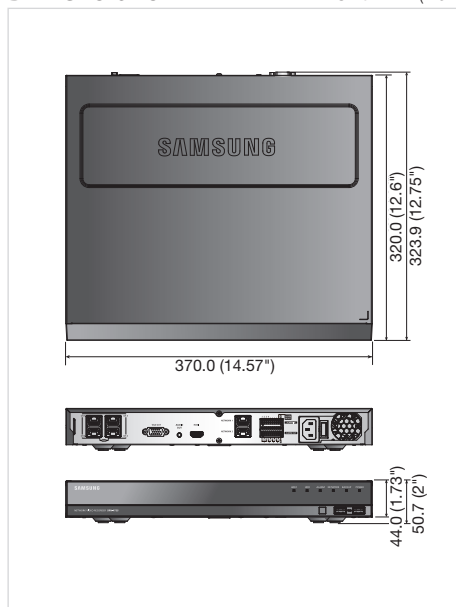

		SRN-472S
DISPLAY		
Video	Inputs	Up to 4CH
	Resolution	CIF ~ 5M
	Protocols	Samsung, ONVIF
Live	Local Display	HDMI / VGA
	Multi Screen Display	[Local monitor] 1 / 4 / Auto sequence, [Web] 1 / 4 / Auto sequence
PERFORMANCE		
Operating System	Embedded	Linux
	Compression	H.264, MJPEG
Recording	Recording Bandwidth	32Mbps (2M 4CH real-time recording)
	Resolution	CIF ~ 5M
	Mode	Normal, Scheduled, Event (Pre / Post)
	Event Trigger	Alarm input(4), Video loss, Camera event (Sensor, MD, Video analytics)
	Event Action	E-mail, PTZ preset, Alarm out, Buzzer, Monitor out
Search & Playback	Playback Bandwidth	32Mbps (4CH simultaneously)
	Mode	Date & Time (Calendar) / Event log list
	Simultaneous Playback	[Local monitor] Up to 4CH, [Web, CMS] Up to 4CH
	Resolution	CIF ~ 5M
	Playback Control	Fast forward / backward, Move one step up / down
Storage	Built-in	1ea
	Internal	2ea (Fixed)
	Capacity	Internal max. 8TB
Back up	File Back up	[USB] : BU/Exe, [Web, CMS] : JPEG, AVI
	Function	Single channel play, Date-time/title display
Sensor	Input / Output	4 / 3 (NO/NC selectable)
Audio	Input	4CH (Network)
	Compression	G.711, G.726
	Audio Communication	2-way
NETWORK		
Protocol Support		TCP/IP, UDP/IP, RTP (UDP), RTP (TCP), RTSP, NTP, HTTP, DHCP (Server, Client), PPPoE, SMTP, ICMP, IGMP, ARP, DNS, DDNS, uPnP, HTTPS, SNMP, ONVIF (Profile-S)
DDNS		Samsung iPOLiS DDNS
Transmission Bandwidth		Min. 32Mbps
Max. Remote Users		Search 3 / Live unicast 10 / Live multicast 20
IP		IPv4 / IPv6
Security		IP address filtering, User access log, 802.1x authentication, Encryption
Language	GUI / Web Viewer	English, French, German, Italian, Spanish, Russian, Turkish, Polish, Dutch, Swedish, Czech, Portuguese, Danish, Rumanian, Serbian, Croatian, Hungarian, Greek, Norwegian, Finnish, Korean, Chinese, Japanese, Thai
OS		[Window] : XP SP2 or above, Vista, 7, 8, [Mac OS] : OSX 10.7 or above
Web Browser		[Internet Explorer] : ver.8 ~ 11, [Firefox] : ver.19.x or above [Chrome] : ver.26.x or above, [Safari] : ver.6.0.3 or above (OSX 10.6 or above)
Viewer Software	Type	SSM, Webviewer, SmartViewer
	CMS Support	SDK / CGI
FUNCTIONS		
Camera Setup	Register	PnP mode, Manual mode
	Setup Items	IP Address, Add Profile Edit, Bitrate, Compression, GOP, Quality, Video Setup (MD, VA, ABF, Brightness/Contrast, Flip/Mirror, IRIS, WDR, D&N, SSNR, Shutter)
PTZ	Control	Via GUI, Webviewer
	Preset	255
Smart phone	OS	Android, iOS
	Control	Live 4 / Playback 1
System Control		Mouse, IR Remocon
INDICATOR / INTERFACE		
Front	Indicator	Power status LED 1ea, HDD action LED 1ea, Alarm status LED 1ea Record status LED 1ea, Network action LED 1ea, Back up LED 1ea
	USB	2ea
Connections	HDMI / VGA	1ea / 1ea
	Audio	Out 1ea (RCA, Line)
	Ethernet	2ea (100Mbps) + PoE 4ea (10/100Mbps)
	Alarm	In 4ea (Terminal block) / Out 3ea (Terminal block)
	Power Cord	AC inlet 1ea
SYSTEM		
Log	Log List	System log : Max. 20000, Event log : Max. 20000
GENERAL		
Electrical	Input Voltage / Current	100 ~ 240V AC / 3.5A 50Hz/60Hz
	NVR Power Consumption	Max. 30W (With 1TB HDD 1ea)
	Camera Power Output	15.4W per Channel, Total 61.6W (PoE, IEEE 802.3af)
Environmental	Operating Temperature	+0°C ~ +40°C (+32°F ~ +104°F)
	Operating Humidity	20% ~ 85% RH
Mechanical	Color / Material	Black / Metal
	Dimensions (WxHxD)	370.0 x 44.0 x 320.0mm (14.57" x 1.73" x 12.6") (1U)
	Weight	2.73Kg (6.02 lb) without HDD
Approvals	Safety	UL, KC
	EMC	CE, FCC, KCC, CCC, Gost-R



The **Eco mark** represents Samsung Techwin's will to create environment-friendly products, and indicates that the product satisfies the EU RoHS Directive.

■ DISTRIBUTED BY



SAMSUNG TECHWIN CO., LTD.

6, Pangyo-ro 319beon-gil, Bundang-gu, Seongnam-si, Gyeonggi-do, SEOUL 463-400 Rep. of KOREA
Tel : +82-70-7147-8741~8749, 8752~8760 Fax : +82-31-8018-3745 www.samsungsecurity.com www.samsungcctv.com
COPYRIGHT BY SAMSUNG TECHWIN. ALL RIGHT RESERVED

SAMSUNG TECHWIN AMERICA Inc.
100 Challenger Rd. Suite 700 Ridgefield Park, NJ 07660
Toll Free : +1-877-213-1222 Direct : +1-201-325-6920
Fax : +1-201-373-0124

SAMSUNG TECHWIN EUROPE LTD.
2nd Floor, No. 5 The Heights, Brooklands, Weybridge, Surrey, KT13 0NY, UK
Tel : +44-1932-82-6700 Fax : +44 1932 82 6701

SHANGHAI SAMSUNG TECHWIN CO., LTD.
32F, Bld B, International Business Center, No. 391 Guiping Rd., Shanghai, China, 200233
Tel : +86-21-5427-1155 Fax : +86-21-5423-5122

I.H-1405

Available from **A1 Security Cameras**
www.a1securitycameras.com email: sales@a1securitycameras.com

Design and specifications are subject to change without notice.



SAMSUNG TECHWIN