


## Platinum Fixed Lens Turret IP Camera 4.1MP CMIP3042W



### Key Features:

- 4.1MP High Definition
- 2688X1520P@20fps
- 4mm Fixed Lens
- 1 Matrix IR LED up to 100ft
- 3D DNR, True WDR 120dB, BLC, VCA
- Junction Box Sold Separately
- DC 12V, PoE

### Dimensions:

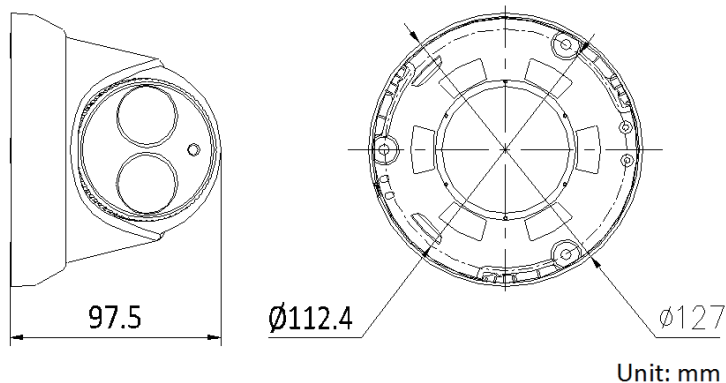

**WDR**  
120dB



# Platinum Fixed Lens Turret IP Camera 4.1 MP

## CMIP3042W

| CAMERA                         |                                                                                                                                                       |
|--------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Image Sensor                   | 1/3" Progressive Scan CMOS                                                                                                                            |
| Min. Illumination              | 0.01Lux @ (F1.2, AGC ON), 0 Lux with IR                                                                                                               |
| Shutter Speed                  | 1/3 s to 1/10,000 s                                                                                                                                   |
| Lens                           | 4mm                                                                                                                                                   |
| Lens Mount                     | M12                                                                                                                                                   |
| Day & Night                    | IR cut filter with auto switch                                                                                                                        |
| DNR                            | 3D DNR                                                                                                                                                |
| Wide Dynamic Range             | 120dB                                                                                                                                                 |
| Angle Adjustment               | Pan: 0° ~ 360°, Tilt: 0° ~ 75°, Rotation: 0° ~ 360°                                                                                                   |
| Compression Standard           |                                                                                                                                                       |
| Video Compression              | H.264 / MJPEG/H.264 Zip+                                                                                                                              |
| H.264 Type                     | Main Profile                                                                                                                                          |
| Video Bit Rate                 | 32 Kbps ~ 8 Mbps                                                                                                                                      |
| Dual streams                   | Support                                                                                                                                               |
| Image                          |                                                                                                                                                       |
| Max. Resolution                | 2688×1520                                                                                                                                             |
| Frame Rate                     | 60Hz: 20fps (2688×1520), 30fps (1920×1080), 30fps(1280×720)<br>50Hz: 20fps (2688×1520), 25fps(1920×1080), 25fps(1280×720)                             |
| Image Setting                  | Rotate Mode, Saturation, Brightness, Contrast, Sharpness adjustable by client software or web browser                                                 |
| BLC                            | Support, zone configurable                                                                                                                            |
| ROI Codec                      | Support                                                                                                                                               |
| Network                        |                                                                                                                                                       |
| Network Storage                | NAS (Support NFS, SMB/CIFS), ANR                                                                                                                      |
| Alarm Trigger                  | Motion detection, Tampering alarm, Network disconnect, IP address conflict, Storage exception                                                         |
| Protocols                      | TCP/IP, UDP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour                 |
| General                        | One-key reset, Flash-prevention, dual stream, heartbeat, mirror, password protection, privacy mask, watermark, IP address filtering, Anonymous access |
| Standard                       | ONVIF (PROFILE S, PROFILE G), PSIA, CGI, ISAPI                                                                                                        |
| Interface                      |                                                                                                                                                       |
| Communication Interface        | 1 RJ45 10M/100M Ethernet port                                                                                                                         |
| Reset                          | Yes                                                                                                                                                   |
| General                        |                                                                                                                                                       |
| Working Temperature / Humidity | -22 °F ~ 140 °F (-30 °C ~ 60 °C)<br>Humidity 95% or less (non-condensing)                                                                             |
| Power Supply                   | DC12V ± 10%, PoE (802.3af)                                                                                                                            |
| Power Consumption              | Max. 5.5W (Max. 7.5W with ICR on)                                                                                                                     |
| IR Range                       | Approx. 100ft (30 meters)                                                                                                                             |
| Weather Proof Ratings          | IP66                                                                                                                                                  |
| Dimensions                     | Φ5.0" × 3.8" (Φ127×97.5mm)                                                                                                                            |
| Weight                         | 1.5 lbs (670g)                                                                                                                                        |