

## **DH-HAC-HDW1100R**

---

1Megapixel 720P IR HDCVI Mini Dome Camera



### **Features**

- 1/2.9" 1Megapixel CMOS
- 25/30fps@720P
- High speed, long distance real-time transmission
- Day/Night(ICR), AWB, AGC, BLC, 2DNR
- 3.6mm fixed lens (6mm optional)
- Max. IR LEDs length 20m, Smart IR
- DC12V


## DH-HAC-HDW1100R

### Technical Specifications


| Model                 | DH-HAC-HDW1100RP                                 |                  | DH-HAC-HDW1100RN |
|-----------------------|--------------------------------------------------|------------------|------------------|
| Camera                |                                                  |                  |                  |
| Image Sensor          | 1/2.9" 1Megapixel CMOS                           |                  |                  |
| Effective Pixels      | 1280(H)×720(V)                                   |                  |                  |
| Electronic Shutter    | 1/50s~1/100,000s                                 | 1/60s~1/100,000s |                  |
| Video Frame Rate      | 25fps@720P                                       | 30fps@720P       |                  |
| Synchronization       | Internal                                         |                  |                  |
| Min. Illumination     | 0.05Lux/F1.6, 0Lux IR on                         |                  |                  |
| Video Output          | 1-channel BNC HDCVI high definition video output |                  |                  |
| Camera Features       |                                                  |                  |                  |
| Max. IR LEDs Length   | 20m, Smart IR                                    |                  |                  |
| Day/Night             | Auto(ICR) / Color / B/W                          |                  |                  |
| Noise Reduction       | 2D                                               |                  |                  |
| Lens                  |                                                  |                  |                  |
| Focal Length          | 3.6mm (6mm optional)                             |                  |                  |
| Angle of View         | H: 88° (52° )                                    |                  |                  |
| Mount Type            | M12                                              |                  |                  |
| General               |                                                  |                  |                  |
| Power Supply          | DC12V±25%                                        |                  |                  |
| Power Consumption     | Max 2.2W                                         |                  |                  |
| Working Environment   | -30°C~+60°C / Less than 95%RH (no condensation)  |                  |                  |
| Transmission Distance | Over 800m via 75-3 coaxial cable                 |                  |                  |
| Dimensions            | Φ85mm×69mm                                       |                  |                  |
| Weight                | 0.1kg                                            |                  |                  |
| Material              | Plastic                                          |                  |                  |

## DH-HAC-HDW1100R

### Dimensions (mm)

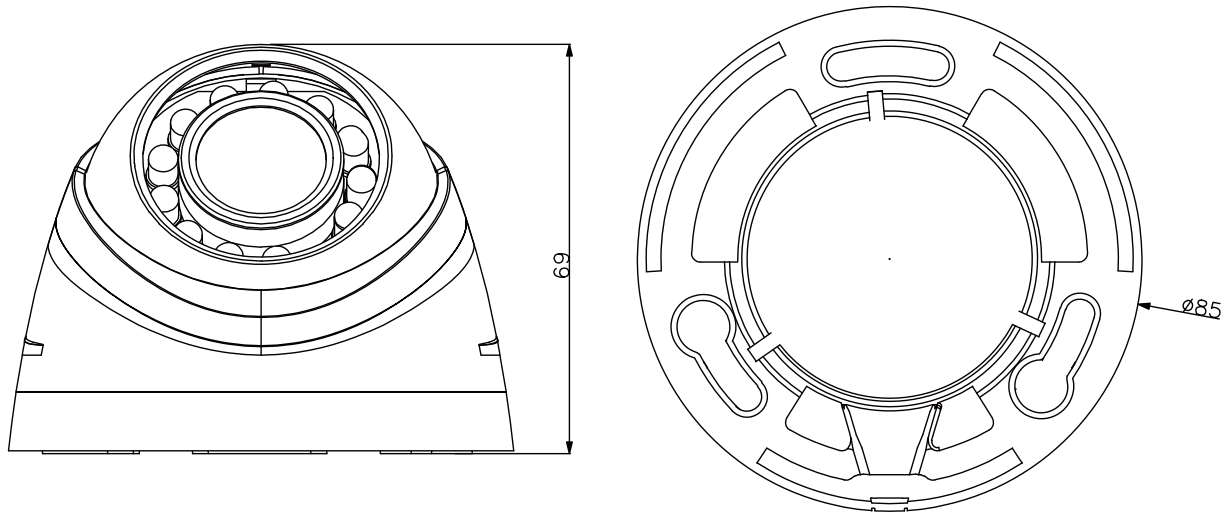

### Accessories (optional)

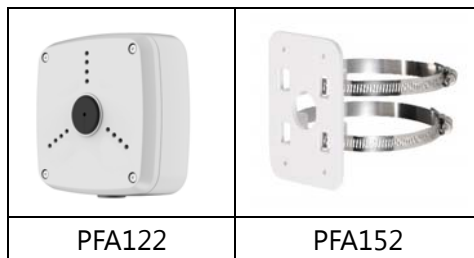

### Dahua Technology Co., Ltd.

1199 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuasecurity.com

\*Design and specifications are subject to change without notice.

© 2014 Dahua Technology