

## NetWaySP3PL 3-port PoE+ Switch

### Description

Altronix NetWaySP3PL PoE+ Switch provides a 1Gb SFP port and two (2) 60W ports and a single 30W port. Cameras/edge devices may be located up to 100m from the unit. Embedded LINQ Technology allows you to monitor, control and report power and diagnostics from anywhere.



NetWaySP3PL

### Key Features


- One (1) Gigabit SFP port.
- 120W total power:
  - Two (2) 60W ports (PoE/PoE+ / Hi-PoE)
  - One (1) 30W port (PoE/PoE+).
- 10/100/1000 Mbps each port.
- IEEE 802.3at (30W), IEEE 802.3af (15W) compliant, or Hi-PoE (60W).
- PoE activity LED indicators.
- Built-in charger for sealed lead acid or gel type batteries.
- Automatic switch over to stand-by battery when AC fails.
- UL Listed in the U.S. and Canada.
- CE Approved.

- Lifetime Warranty / Made in the U.S.A.

### Similar products:

- NetWaySP3WPX - Outdoor 3-port PoE+ Hardened Switch in NEMA 4/4X, IP66-11 enclosure which accommodates stand-by batteries.
- NetWaySP3WP - Outdoor 3-port PoE+ Hardened Switch in NEMA 4/4X, IP66-11 enclosure.
- NetWaySP3WPN - Outdoor 3-port PoE+ Hardened Switch only in NEMA 4/4X, IP66-11 enclosure.
- NetWaySP3X - Indoor 3-port PoE+ Hardened Switch.
- NetWaySP3B - 3-port PoE+ Switch board only.

### Typical Application

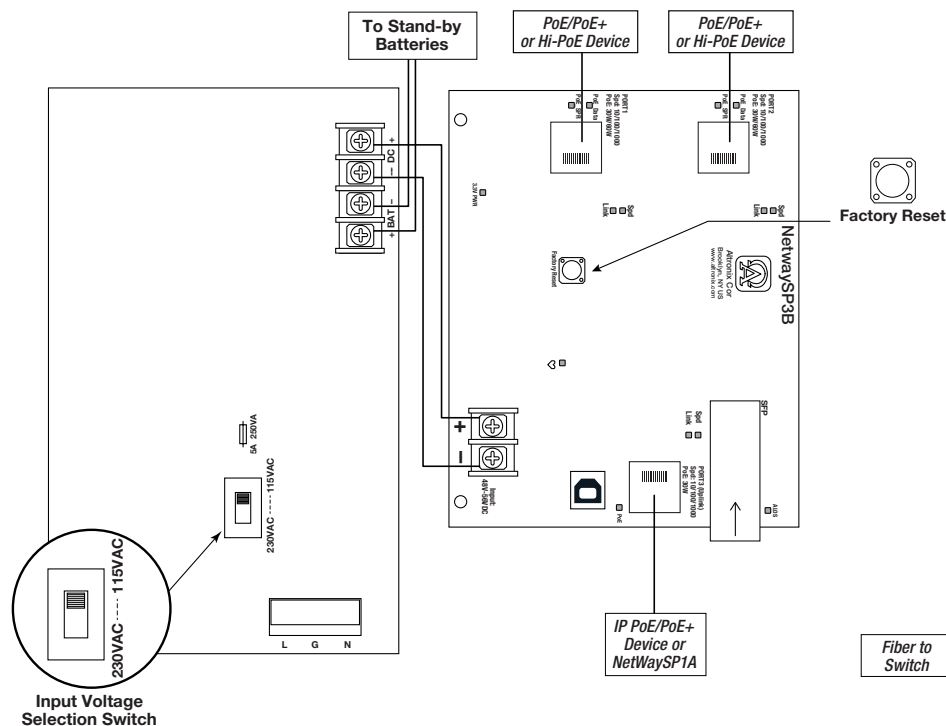

## NetWaySP3PL 3-port PoE+ Switch

### Specifications

#### Input

Voltage	115VAC, 60Hz, 2.5A or 230VAC, 50/60Hz, 1.3A.
Fusing	5A/250V.

#### Power Output

Maximum Power	120W total power: Two (2) 60W ports (PoE/PoE+ / Hi-PoE). One (1) 30W port (PoE/PoE+). 10/100/1000 Mbps each port. IEEE 802.3at (30W), IEEE 802.3af (15W) compliant, or Hi-PoE (60W). Integral surge protection.
---------------	--

**Fiber Ports:** One (1) Gigabit SFP port.

**Ethernet Ports:** Three (3) 10/100/1000 Mbps ports.  
Connectivity: RJ45, auto-crossover.  
Wire type: 4-pair CAT5 or better structured cable.  
Distance: up to 100m.  
Speed: 10/100/1000 Mbps, half/full duplex, auto negotiation.

#### Back-up Battery (not included)

Type	Sealed lead acid or gel type.
Failover	Upon AC loss, instantaneous.

#### Indicators (LED)

Individual PoE On LEDs for each port.  
Individual IP Link status, 10/100Base-T/active LEDs for each port.  
ALOS LED indicates fiber connection for SFP port.  
Heartbeat LED indicates proper operation of the unit.

#### LINQ Technology:

Remote network management allows for camera/device reset and monitoring.  
Provides local and/or remote access to critical information via LAN/WAN.  
Email and Windows Dashboard Alert notifications report real-time diagnostics.  
Event log tracks history.

#### Agency Listings

UL/cUL	UL60950-1 (Information Technology Equipment). UL60950-22 (Information Technology Equipment to be installed Outdoors).
CE	European Conformity.

#### Physical and Environmental

**Backplane Dimensions (H x W x D approx.):**  
10.75" x 8.875" x 2.375" (273.1mm x 225.4mm x 60.3mm).

#### Product Weight / Shipping (approx.)

Product Weight:	2.6 lb. (1.18 kg).
Shipping Weight:	4.0 lb. (1.81kg).

#### Temperature

Operating:	60W: -40°C to 75°C (-40°F to 167°F). 75W: -40°C to 70°C (-40°F to 158°F). 100W: -40°C to 55°C (-40°F to 131°F). 120W: -40°C to 45°C (-40°F to 113°F).
Storage:	-40°C to 85°C (-40°F to 185°F).

Relative Humidity:	85% +/-5%
BTU/Hr. (approx.):	61 BTU/Hr.
Operating Altitude:	-304.8 to 2,000m.

### Accessories



#### NetWaySP1A - Ethernet over Fiber Media Converter/Repeater

*For Applications requiring an additional SFP (Fiber) Port*

NetWaySP1A PoE powered media converter/repeater converts 10/100/1000 Mbps to Fiber (1000Base-X/SX/LX).



#### P1MM and P1SM10 - SFP Modules

Altronix P1MM and P1SM10 are hot-pluggable SFP fiber transceiver modules and are readily usable with all Altronix Spectrum fiber optic equipment for 1G transmission rates. The P1MM is to be used with Multi-Mode Fiber for distances up to 550m. The P1SM10 is to be used with Single-Mode Fiber for distances up to 10Km.