

NetWaySP3WP

3-port PoE+ Hardened Switch

Description

Altronix NetWaySP3WP Outdoor PoE+ Hardened Switch provides a 1Gb SFP port and two (2) 60W ports and a single 30W port. Cameras/edge devices may be located up to 100m from the unit. Embedded LINQ Technology allows you to monitor, control and report power and diagnostics from anywhere.



NetWaySP3WP

Key Features


- One (1) Gigabit SFP port.
- 120W total power:
 - Two (2) 60W ports (PoE/PoE+ / Hi-PoE)
 - One (1) 30W port (PoE/PoE+).
- 10/100/1000 Mbps each port.
- IEEE 802.3at (30W), IEEE 802.3af (15W) compliant, or Hi-PoE (60W).
- PoE activity LED indicators.
- NEMA4/4X, IP66 Rated enclosure for outdoor use.
- Built-in charger for sealed lead acid or gel type batteries.
- Automatic switch over to stand-by battery when AC fails.
- UL Listed in the U.S. and Canada.

- CE Approved.
- Lifetime Warranty / Made in the U.S.A.

Similar products:

- NetWaySP3WPX - Outdoor 3-port PoE+ Hardened Switch in NEMA 4/4X, IP66-11 enclosure which accommodates stand-by batteries.
- NetWaySP3WPN - Outdoor 3-port Hardened Switch only in NEMA 4/4X, IP66-11 enclosure.
- NetWaySP3X - Indoor 3-port PoE+ Hardened Switch.
- NetWaySP3PL - 3-port PoE+ Hardened Switch on Backplane.
- NetWaySP3B - 3-port PoE+ Switch board only.

Typical Application

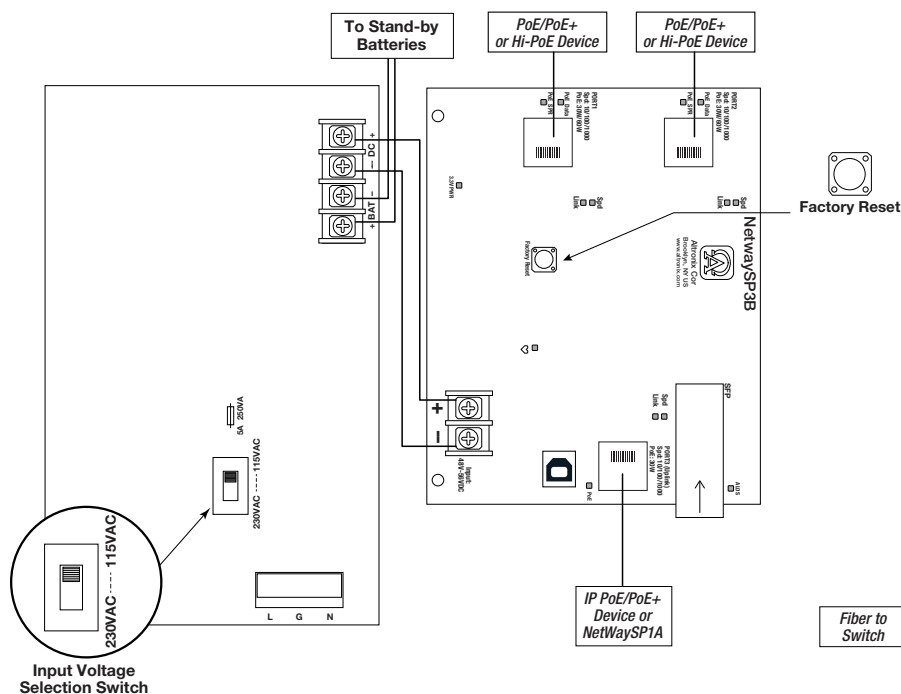

NetWaySP3WP

3-port PoE+ Hardened Switch

Specifications

Input

Voltage 115VAC, 60Hz, 2.5A or 230VAC, 50/60Hz, 1.3A.
Fusing 5A/250V.

Power Output

Maximum Power 120W total power:
Two (2) 60W ports (PoE/PoE+ / Hi-PoE).
One (1) 30W port (PoE/PoE+).
10/100/1000 Mbps each port.
IEEE 802.3at (30W), IEEE 802.3af (15W) compliant, or Hi-PoE (60W).
Integral surge protection.

Fiber Ports:

One (1) Gigabit SFP port.

Ethernet Ports:

Three (3) 10/100/1000 Mbps ports.
Connectivity: RJ45, auto-crossover.
Wire type: 4-pair CAT5 or better structured cable.
Distance: up to 100m.
Speed: 10/100/1000 Mbps, half/full duplex, auto negotiation.

Back-up Battery (not included)

Type Sealed lead acid or gel type.
Failover Upon AC loss, instantaneous.

Indicators (LED)

Individual PoE On LEDs for each port.
Individual IP Link status, 10/100Base-T/active LEDs for each port.
ALOS LED indicates fiber connection for SFP port.
Heartbeat LED indicates proper operation of the unit.

LINQ Technology:

Remote network management allows for camera/device reset and monitoring.
Provides local and/or remote access to critical information via LAN/WAN.
Email and Windows Dashboard Alert notifications report real-time diagnostics.
Event log tracks history.

Agency Listings

UL/cUL	UL60950-1 (Information Technology Equipment). UL60950-22 (Information Technology Equipment to be installed Outdoors).
CE	European Conformity.

Physical and Environmental

Enclosure Dimensions (H x W x D approx.):
13.31" x 11.31" x 5.59" (338.1mm x 287.3mm x 142mm).
NEMA 4/4X, IP66-11 Rated enclosure for outdoor use.

Product Weight / Shipping (approx.)

Product Weight: 10.32 lbs. (4.68 kg).
Shipping Weight: 11.7 lbs. (5.3 kg).

Temperature

Operating: 60W: -40°C to 75°C (-40°F to 167°F).
75W: -40°C to 70°C (-40°F to 158°F).
100W: -40°C to 55°C (-40°F to 131°F).
120W: -40°C to 45°C (-40°F to 113°F).

Storage: -40°C to 85°C (-40°F to 185°F).

Relative Humidity: 85% +/-5%

BTU/Hr. (approx.): 61 BTU/Hr.

Operating Altitude: -304.8 to 2,000m.

Accessories



NetWaySP1A - Ethernet over Fiber Media Converter/Repeater

For Applications requiring an additional SFP (Fiber) Port

NetWaySP1A PoE powered media converter/repeater converts 10/100/1000 Mbps to Fiber (1000Base-X/SX/LX).



P1MM and P1SM10 - SFP Modules

Altronix P1MM and P1SM10 are hot-pluggable SFP fiber transceiver modules and are readily usable with all Altronix Spectrum fiber optic equipment for 1G transmission rates. The P1MM is to be used with Multi-Mode Fiber for distances up to 550m. The P1SM10 is to be used with Single-Mode Fiber for distances up to 10Km.



PMK1 Pole Mount Kit (order separately)

PMK1 pole mount kit is designed to simplify installation of outdoor units. It accommodates 2" - 8" (diameter) poles.