

## NetWaySP3WPN

### 3-port PoE+ Hardened Switch

#### Description

Altronix NetWaySP3WPN Outdoor PoE+ Hardened Switch provides a 1Gb SFP port and two (2) PoE+/ Hi-PoE (60W) ports. Cameras/edge devices may be located up to 100m from the unit. Embedded LINQ Technology allows you to monitor, control and report power and diagnostics via the network from anywhere.



NetWaySP3WPN

#### Key Features


- One (1) Gigabit SFP port.
- 120W total power:
  - Two (2) 60W ports (PoE/PoE+ / Hi-PoE)
  - One (1) 30W port (PoE/PoE+).
- 10/100/1000 Mbps each port.
- IEEE 802.3at (30W), IEEE 802.3af (15W) compliant, or Hi-PoE (60W).
- PoE activity LED indicators.
- NEMA4/4X, IP66 Rated enclosure for outdoor use.
- UL Listed in the U.S. and Canada.
- CE Approved.

- Lifetime Warranty / Made in the U.S.A.

#### Similar products:

- NetWaySP3WPX - Outdoor 3-port PoE+ Hardened Switch in NEMA 4/4X, IP66-11 enclosure which accommodates stand-by batteries.
- NetWaySP3WP - Outdoor 3-port PoE+ Hardened Switch in NEMA 4/4X, IP66-11 enclosure.
- NetWaySP3X - Indoor 3-port PoE+ Hardened Switch.
- NetWaySP3PL - 3-port PoE+ Hardened Switch on Backplane.
- NetWaySP3B - 3-port PoE+ Switch board only.

#### Typical Application

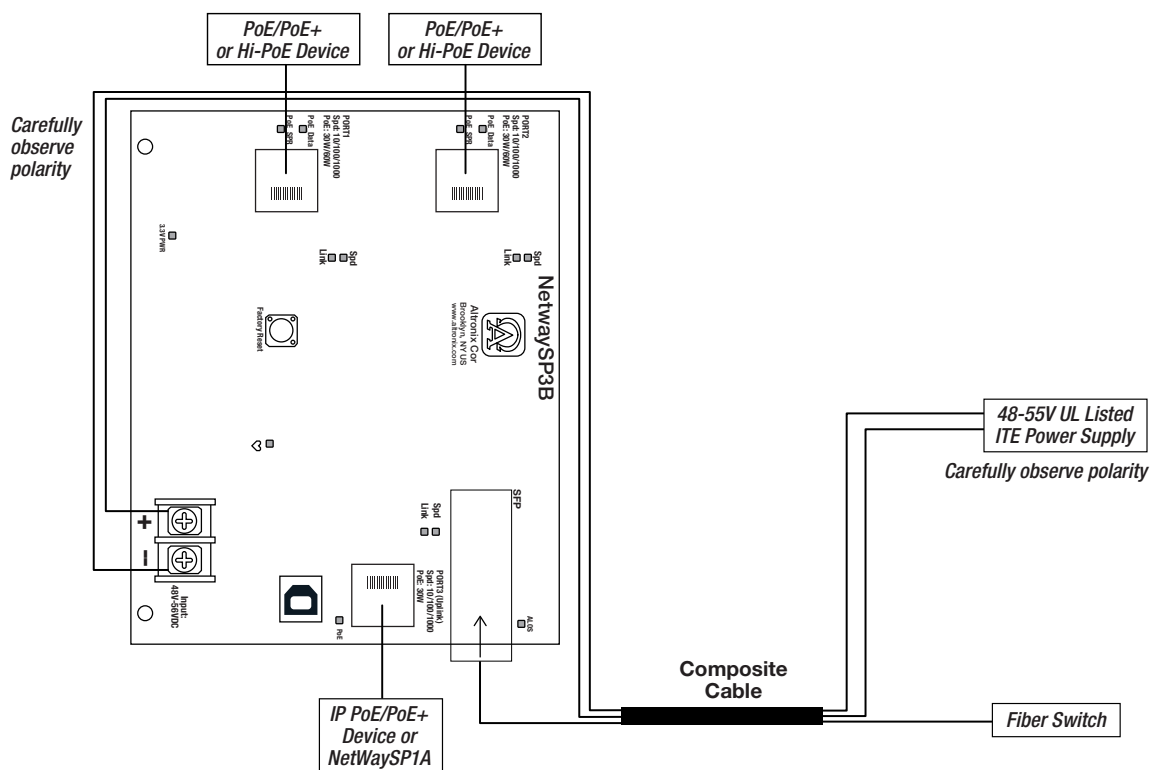

## NetWaySP3WPN 3-Port PoE+ Hardened Switch

### Specifications

#### Input

Voltage 48-55V UL Listed ITE power supply (up to 120W).

#### Power Output

Maximum Power 120W total power:  
Two (2) 60W ports (PoE/PoE+ / Hi-PoE).  
One (1) 30W port (PoE/PoE+).  
10/100/1000 Mbps each port.  
IEEE 802.3at (30W), IEEE 802.3af (15W) compliant, or Hi-PoE (60W).  
Integral surge protection.

#### Fiber Ports:

One (1) Gigabit SFP port.

#### Ethernet Ports:

Three (3) 10/100/1000 Mbps ports.  
Connectivity: RJ45, auto-crossover.  
Wire type: 4-pair CAT5 or better structured cable.  
Distance: up to 100m.  
Speed: 10/100/1000 Mbps, half/full duplex, auto negotiation.

#### Indicators (LED)

Individual PoE On LEDs for each port.  
Individual IP Link status, 10/100Base-T/active LEDs for each port.  
ALOS LED indicates fiber connection for SFP port.  
Heartbeat LED indicates proper operation of the unit.

#### LINQ Technology:

Remote network management allows for camera/device reset and monitoring.  
Provides local and/or remote access to critical information via LAN/WAN.  
Email and Windows Dashboard Alert notifications report real-time diagnostics.  
Event log tracks history.

#### Agency Listings

UL/cUL	UL60950-1 (Information Technology Equipment). UL60950-22 (Information Technology Equipment to be installed Outdoors).
CE	European Conformity.

#### Physical and Environmental

##### Enclosure Dimensions (H x W x D approx.):

13.31" x 11.31" x 5.59" (338.1mm x 287.3mm x 142mm).

NEMA 4/4X, IP66-11 Rated enclosure for outdoor use.

##### Product Weight / Shipping (approx.)

Product Weight: 7.7 lb. (3.49 kg).

Shipping Weight: 10 lb. (4.54 kg).

##### Temperature

Operating (120W): -40°C to 75°C (-40°F to 167°F)

Storage: -40°C to 85°C (-40°F to 185°F)

Relative Humidity:

85% +/-5%.

Operating Altitude:

-304.8 to 2,000m.

### Accessories



#### NetWaySP1A - Ethernet over Fiber Media Converter/Repeater


*For Applications requiring an additional SFP (Fiber) Port*

NetWaySP1A PoE powered media converter/repeater converts 10/100/1000 Mbps to Fiber (1000Base-X/SX/LX).



#### P1MM and P1SM10 - SFP Modules

Altronix P1MM and P1SM10 are hot-pluggable SFP fiber transceiver modules and are readily usable with all Altronix Spectrum fiber optic equipment for 1G transmission rates. The P1MM is to be used with Multi-Mode Fiber for distances up to 550m. The P1SM10 is to be used with Single-Mode Fiber for distances up to 10Km.



#### PMK1 Pole Mount Kit (order separately)

PMK1 pole mount kit is designed to simplify installation of outdoor units. It accommodates 2"- 8"(diameter) poles.