

NetWaySPLWPX Series

Hardened PoE+ Switches with Optimized Lithium Iron Phosphate Battery Charger

Description

Altronix Hardened Ethernet over Fiber PoE+ Switches with Optimized Lithium Iron Phosphate Battery Charger provide one (1) or two (2) 1Gb SFP (Fiber) ports, three (3), four (4) or eight (8) PoE (up to 15W) or two (2) PoE+ (up to 30W) ports passing data for PoE/PoE+ compliant devices. Outputs are also configurable for a single Hi-PoE (60W) port. These units are designed to support a single 12V LiFePO₄ (Lithium Iron Phosphate) battery for high storage and charge/discharge cycle life reliability.



NetWaySP4LWPX

Key Features


- One (1) or two (2) Gigabit SFP ports.
- 75W total power.
- IEEE 802.3af (15W), IEEE 802.3at (30W) and IEEE802.3bt (Type 3 "4PPoE" 60W) compliant.
- PoE activity LED indicators.
- Built-in charger for 12V LiFePO₄ (Lithium Iron Phosphate) battery.
- Automatic switch over to stand-by battery when AC fails.
- NEMA4/4X, IP66 Rated enclosure for outdoor use.
- Lifetime Warranty / Made in the U.S.A.

NetWaySPLWPX Series Hardened PoE+ Switch Configuration Reference Chart

Altronix Model Number	SFP Ports	PoE and PoE+ Ports (up to 30W)	Hi-PoE Ports (up to 60W)
NetWaySP3LWPX	1	3	1
NetWaySP4LWPX	2	4	Up to 2*
NetWay4ELWPX	1	4	1
NetWaySP8LWPX	2	8	Up to 2*

*Note: Units provide a total of 75W power. Thus, at any time, only one designated port can provide full 60W output.

Typical Application

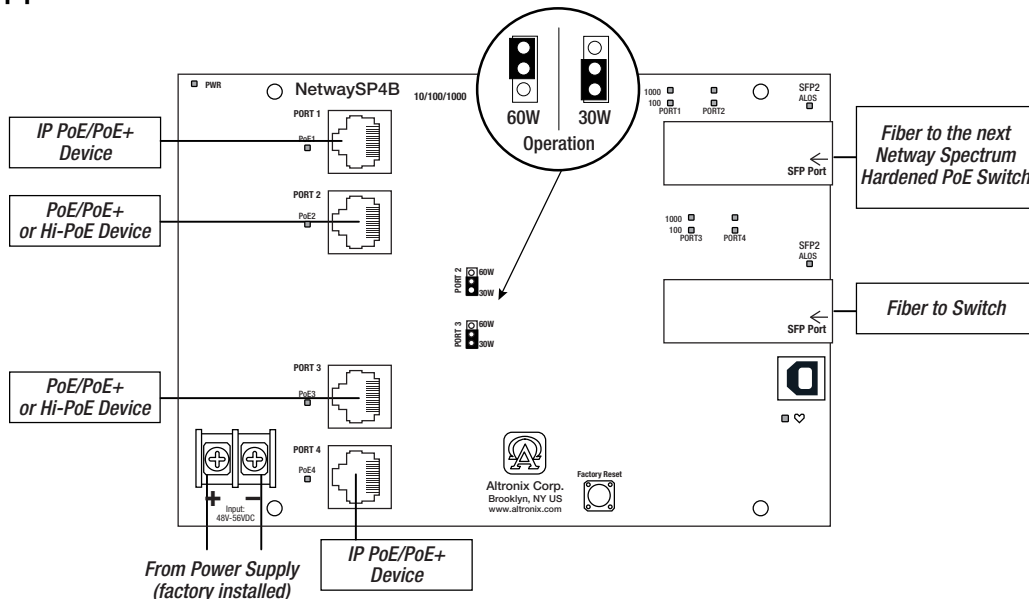

NetWaySPLWPX Series

Hardened PoE+ Switches with Optimized Lithium Iron Phosphate Battery Charger

Specifications

Input

Voltage	115VAC, 60Hz, 2.5A or 230VAC, 50/60Hz, 1.3A.
Fusing	5A/250V.

Power Output

See Configuration Chart for output ports.
Integral surge protection.

Fiber Ports: One (1) or two (2) Gigabit SFP ports.

Ethernet Ports: 10/100/1000 Mbps ports.
Connectivity: RJ45, auto-crossover.
Wire type: 4-pair CAT5 or better structured cable.
Distance: up to 100m.
Speed: 10/100/1000 Mbps, half/full duplex, auto negotiation.

Indicators (LED)

Individual PoE On LEDs for each port.
Individual IP Link status, 10/100Base-T/active LEDs for each port.
ALOS LED indicates fiber connection for SFP port.
Heartbeat LED indicates proper operation of the unit.

Back-up Battery (not included)

Type	LiFePO ₄ (Lithium Iron Phosphate).
Failover	Upon AC loss, instantaneous.

LINQ Technology:

Remote network management allows for camera/device reset and monitoring.
Provides local and/or remote access to critical information via LAN/WAN.
Email and Windows Dashboard Alert notifications report real-time diagnostics.
Event log tracks history.

Physical and Environmental

Enclosure Dimensions (H x W x D approx.):
17.53" x 15.3" x 6.67" (445.3mm x 388.6mm x 169.4mm).
NEMA 4/4X, IP66-11 Rated enclosure for outdoor use.
Accommodates one (1) LiFePO₄ (Lithium Iron Phosphate) battery.
Product Weight / Shipping (approx.)
Product Weight: 15 lb. (6.8 kg).
Shipping Weight: 17.5 lb. (7.9 kg).
Temperature
Operating: 60W: -40°C to 75°C (-40°F to 167°F).
75W: -40°C to 70°C (-40°F to 158°F).
Storage: -40°C to 85°C (-40°F to 185°F).
Relative Humidity: 85% +/-5%.
BTU/Hr. (approx.): 61 BTU/Hr.
Operating Altitude: -304.8 to 2,000m.

Accessories



P1MM and P1SM10 SFP Modules.

P1MM and P1SM10 are hot-pluggable SFP fiber transceiver modules and are readily usable with all Altronix Spectrum fiber optic equipment for 1G transmission rates.

The P1MM is to be used with Multi-Mode Fiber for distances up to 550m.
The P1SM10 is to be used with Single-Mode Fiber for distances up to 10km.



P1A2K SFP Single-Mode Transceiver Kit.

P1A2K and P1B2K are hot-pluggable bi-directional single strand SFP fiber transceiver modules and are readily usable with all Altronix NetWay Spectrum fiber optic equipment for 1G transmission rates at distances up to 2km.



NetWaySP1A Ethernet over Fiber Media Converter/Repeater.

For Applications requiring an additional SFP (Fiber) Port

NetWaySP1A PoE powered media converter/repeater converts 10/100/1000 Mbps to Fiber (1000Base-X/SX/LX).



BTL125 12VDC/4.5AH LiFePO₄ Battery.

Usable with all Altronix Spectrum fiber optic equipment with Optimized Lithium Iron Phosphate Battery Charger.



PMK2 Pole Mount Kit.

PMK2 pole mount kit is designed to simplify installation of outdoor units. It accommodates 2" - 8"(diameter) poles.