


PoE60 56VDC/75W Power Supply/Charger

Description

Altronix PoE60 provides 75W for NetWay Spectrum switches.

It also features a built-in charger for LiFePO₄ (lithium iron phosphate) battery.

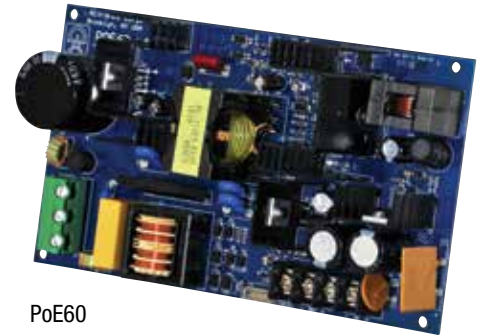

PoE60

Specifications

Input

Voltage 115VAC, 60Hz, 2.5A or
230VAC, 50/60Hz, 1.3A

Output

Voltage 56VDC/75W.
Current 1.3A continuous supply current.
Maximum Power 75W total power.
Integral surge protection.

Back-up Battery *(not included)*

Built-in charger for LiFePO₄ (lithium iron phosphate) battery.
Automatic switch over to stand-by battery when AC fails.

Physical and Environmental

Dimensions (L x W x H)

7.125" x 4.0" x 2" (181mm x 101.6mm x 50.8mm).

Product Weight 1.75 lbs. (0.8 kg).

Shipping Weight 2.2 lbs. (1 kg).

Temperature

Operating (75W): -40°C to 70°C (-40°F to 158°F).


Storage -40°C to 85°C (-40°F to 185°F).

Relative Humidity 85% +/-5%.

BTU/Hr (approx.): 38 BTU/Hr.

Mounting hardware included.

Typical Applications

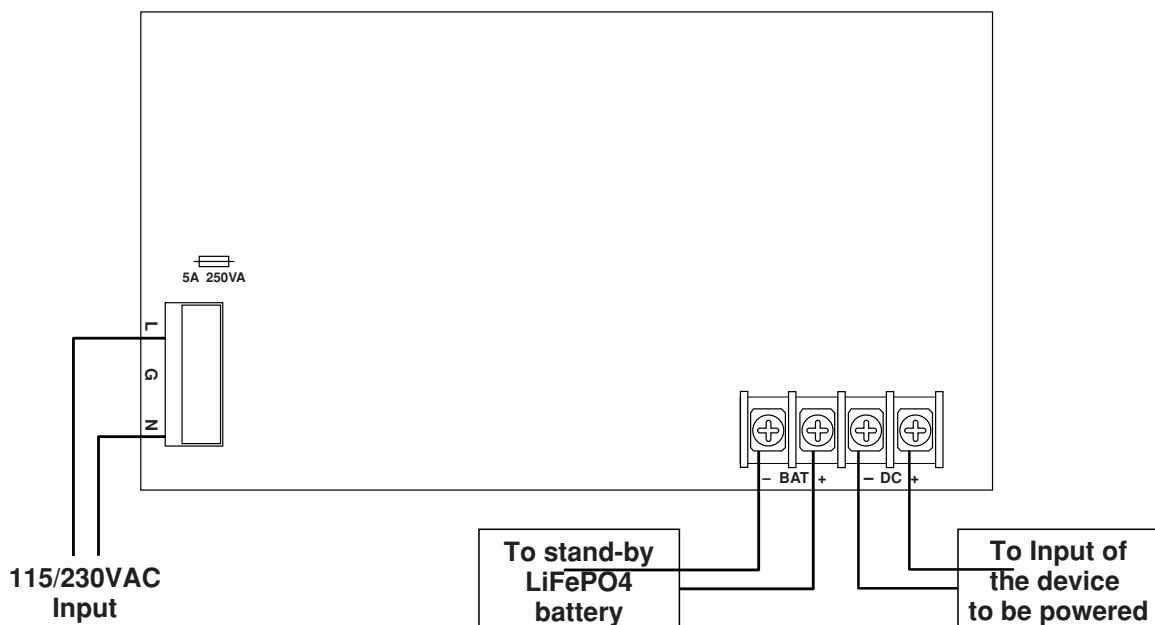

PoE60
56VDC/75W Power Supply/Charger

Board Dimensions (L x W x H) and Drawing

7.125" x 4.0" x 2" (181mm x 101.6mm x 50.8mm)

