

MicroDome® G2 IP Megapixel Cameras

1.2, 1080p, 3, and 5 Megapixel (MP) H.264 All-in-One Ultra Low Profile Remote Focus True Day/Night Indoor/Outdoor Dome IP Cameras with SNAPstream™ (Smart Noise Adaptation and Processing), Enhanced WDR™ (Wide Dynamic Range), NightView™, and IR LED Models



The MicroDome® G2 multi-megapixel camera series delivers 1.2-, 1080p, 3-, or 5-megapixel resolutions. These true day/night cameras are available with a choice of lenses 2.8mm, 4mm, 6mm, 8mm, 12mm, and 16mm options. With a day/night mechanical IR cut filter this camera is ideal for applications with challenging lighting conditions, regardless the time of day.

The MicroDome G2 megapixel IP camera series is available in an indoor, in-ceiling housing or in a surface mount IP66 rated version for indoor and outdoor applications. Surface and flush mount models feature a vandal resistant, IK-10 rated cast-aluminum housing with a polycarbonate bubble making it capable of withstanding the equivalent of 55 kg (120 lbs) of force.

MicroDome G2 megapixel IP cameras deliver professional surveillance, with ease of installation and set-up, for a variety of network surveillance requirements. The remote focus module allows users to simply click “Short-range Focus” or “Full-range Focus” saving installers time and end users money—an easy return on investment. The three-axis lens adjustment provides users with more camera

placement options, allowing the cameras to be easily mounted on a wall or ceiling so they can pan, tilt, and rotate the lens in a variety of directions for a precise field of view. An innovative spring arm design makes in-ceiling F-model installations a snap: simply slide the camera through the hole and secure the magnetized cover ring with a single screw. No additional hardware is required.

For challenging low-light applications, the 1.2MP model features NightView™, making it capable of covering areas where very little light is present. In addition, IR LEDs are available on surface mount configurations. For applications with strong backlighting, reflections from wet flooring/puddles, or contrast due to fog, mist, or glare, Enhanced WDR™ wide dynamic range is available on select 1080p and 3MP models.

The MicroDome G2 is ONVIF Profile S (Open Network Video Interface Forum) compliant, providing interoperability between network video products regardless of manufacturer.



Series Features

- 1.2, 1080p, 3, or 5MP Models
- SNAPstream™ (Smart Noise Adaptation and Processing) Capability to Reduce Bandwidth without Impacting Image Quality
- Strong Low Light Performance via NightView™ on 1.2MP Cameras and Binning Mode on 3MP and 5MP Cameras
- True Day/Night Functionality with Mechanical IR Cut Filter
- Enhanced WDR™ up to 100dB at Full Resolution: See Clearly in Shaded and Bright Light Conditions Simultaneously on Select 1080p and 3MP Models
- Casino Mode™ Maintains 30fps or Higher Required by Gaming Industry Regulations (Select 1080p Models)
- CorridorView™ Allows 90° Image Rotation for Better Coverage in Hallways and Corridors
- Dual Encoder H.264/MJPEG
- Privacy Mask, Motion Detection, Flexible Cropping, Bit Rate Control, Multi-Streaming, Multicasting, and Forensic Zooming
- Remote Focus Module
- Multiple Lens Options Available (Sold Separately)
- Optional IR LEDs (IR Models)
- Easily Adjustable 3-Axis Gimbal
- Network Protocols Include 802.1x, IPv6, QoS, DHCP, and More
- All-in-One H.264 Total Power Over Ethernet (PoE) Solution
- Spring-Arm Design for Very Easy Installation (-F Models)
- Ultra Low Profile Design / Small Size
- Tamper-Resistant Housing
- IK-10 Impact-Resistant Housing Outdoor Rated IP66 (-S Models)
- Integrated Microphone (-F Models)

Camera Imaging Specifications

Model		AV1555DN	AV2555DN	AV2556DN	AV3555DN	AV3556DN	AV5555DN
Image Sensor (CMOS)		1.2MP	1080p (2.1MP)	1080p (2.1MP)	3MP	3MP	5MP
Optical Format		1/3"	1/3"	1/3.2"	1/3"	1/3.2"	1/2.5"
Pixel Pitch		3.75µm	2.2µm	2.2µm	2.2µm	2.2µm	2.2µm
Minimum Illumination	Color (Day Mode)	0.03 Lux	0.2 Lux	0.2 Lux	0.2 Lux	0.2 Lux	0.3 Lux
	Color Binning (Day Mode)	-	-	-	0.1 Lux	0.1 Lux	0.15 Lux
	B/W (Night Mode)	0.003 Lux, IR sensitive	0.02 Lux, IR sensitive	0.02 Lux, IR sensitive	0.02 Lux, IR sensitive	0.02 Lux, IR sensitive	0.03 Lux, IR sensitive
Full FOV Resolution		1280 H x 960 V	1920 H x 1080 V	1920 H x 1080 V	2048 H x 1536 V	2048 H x 1536 V	2592 H x 1944 V
1/4 Resolution		640 H x 480 V	960 H x 540 V	960 H x 540 V	1024 H x 768 V	1024 H x 768 V	1296 H x 972 V
Dynamic Range		83.5dB	69.5dB	WDR up to 100dB	69.5dB	WDR up to 100dB	70.1dB
Frame Rates*	At Max Res.	37fps (1280 x 960)	30fps (1920 x 1080)	30fps (1920 x 1080)	21fps (2048 x 1536)	21fps (2048 x 1536)	14fps (2592 x 1944)
	Cropped	-	30fps (1280 x 1024)	30fps (1280 x 1024)	30fps (1920 x 1080) 30fps (1280 x 1024)	30fps (1920 x 1080) 30fps (1280 x 1024)	21fps (2048 x 1536) 29fps (1920 x 1080) 41fps (1280 x 1024)
	Binning Mode	-	-	-	46fps (1024 x 768) 64fps (960 x 540)	21fps (1024 x 768) 21fps (800 x 600) 21fps (960 x 540) 21fps (640 x 512)	34fps (1296 x 972) 46fps (1024 x 768) 64fps (960 x 540)
Lens**	Fixed Iris	MPM2.8A 2.8mm, 1/2.5", F/1.8, IR corrected, M12-mount					
	H-FOV	95°	83°	83°	89°	89°	113°

* Maximum with H.264 compression ** 2.8mm standard lens

Programmability

Optics	M12 lens and remote focus module
Low Light Performance	NightView™ Mode 1.2MP models
	Pixel Binning Mode 3MP and 5MP models
Picture-in-Picture	Simultaneous delivery of full field-of-view and zoomed images
Programmable Shutter Speed	Controls motion blur, 1ms–500ms
Motion Detection	Real-time, 1024 detection zones
Privacy Masking	Unlimited
Casino Mode™	Maintains 30fps or higher (AV2555 model)
Flexible Cropping	Resolution windowing down to 1x1 pixel for JPEG and 2x2 pixels for H.264
Backlight Compensation	Custom white balance
Flicker Control	5Hz–255Hz adjustable
Image Rotation	CorridorView™ (90°, 180°, and 270° image rotation)
Wide Dynamic Range	Auto adjustment between WDR and LDR modes (WDR models only)
Microphone	Integrated (-F models)
Efficiency	SNAPstream™ (Smart Noise Adaptation and Processing)
	Bit rate and bandwidth limitation control
	Bandwidth and storage savings by running at 1/4 resolution
Sharpness	Selectable enhancement level
Miscellaneous	Programmable resolution, brightness, saturation, gamma, tint
	Electronic pan, tilt, zoom (PTZ)

Audio Electrical

Compression	G.711 PCM 8 kHz
Input	Microphone in (integrated on -F models)

Data Transmission

Compression Type	H.264 (MPEG-4, Part 10)/Motion JPEG
	21 levels of quality
Network Protocols	HTTP, IPv4, IPv6, QoS, 802.1x, RTSP, RTP/TCP, RTP/UDP, TFTP, DHCP
Network Interface	100Base-T Ethernet
Multi-Streaming	8 non-identical streams

Compliance

Industry Standard	ONVIF Profile S conformant
Listings	UL (CB)
FCC Compliance	47 CFR 15 Class A
Environmental	RoHS, REACH, WEEE
Markings	(CE) EN55022 Class A, EN55024, EN61000-3-2, EN61000-3-3, EN60950-1
Mechanical	IP66 (EN60529) (-S model), IK-10
CoO	Made in the USA

Environmental

Operating Temperature	-F Model	-5°C (23°F) to +50°C (122°F)
	-S Model	-40°C (-40°F) to +50°C (122°F)
Humidity	0% to 90% (non-condensing)	
Storage Temperature	-20°C (-4°F) to +60°C (140°F)	

Electrical

Alarm Input/Output	General purpose opto-coupled, 1 input/1 output
Power Over Ethernet	PoE 802.3af, Class 2

See Next Page for Power Consumption and Mechanical Specs

Max Power Consumption (Watts DC power)

Model	AV1555/AV2555	AV2556/AV3556	AV3555/AV5555
DN	4.4	5.5	5.0
DNIR	4.6	5.7	5.2

Mechanical


Casing	Tamper-resistant housing, IK-10 impact-resistant	
	-F Model	In-ceiling mount with die-cast aluminum cover and 2" polycarbonate dome bubble
	-S Model	Surface mount with die-cast aluminum housing and 2" polycarbonate dome bubble
		IP66 weather proof standard 3/8" NPT w/ 1/2" NPT adapter included
Lens	2.8mm board mount (M12), fixed iris, F/1.8 (except -NL models)	
Gimbal	Easy 3-axis camera adjustment w/ 359° pan and 90° tilt and 360° z-axis	
Dimensions <i>(See Dimensions)</i>	Unit	Ø 4" (100mm) x 3.1" H (78.5mm)
	Packaged	5.6" W (142mm) x 5.6" L (142mm) x 3.5" H (90mm)
Weight	Unit	0.95lbs (0.43kg)
	Packaged	1.3lbs (0.6kg)

IR Illuminator

3 pcs 850nm LEDs / 50ft (15m) IR distance (max) / 80° IR angle


Total PoE Solution (No external power requirement)

Dimensions

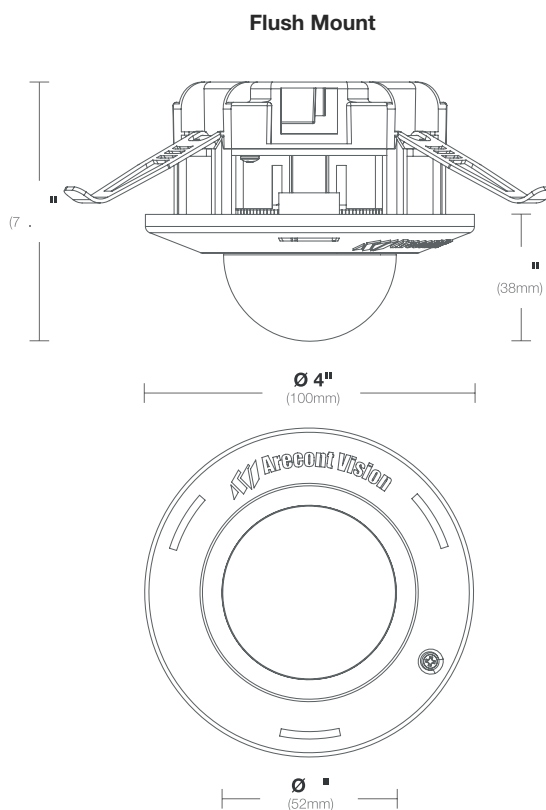


Quick Installation (Flush mount models)


- 1 Push the three spring actuated retention arms in the upward position.

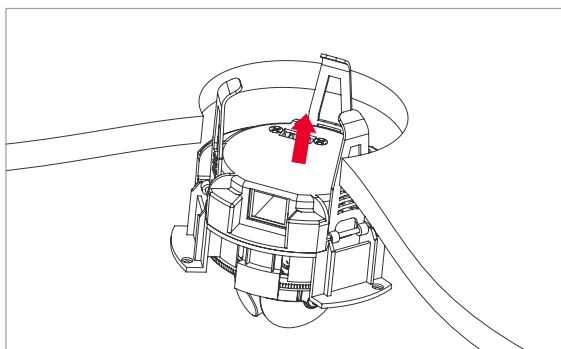

- 2 The retention arms lock into place.

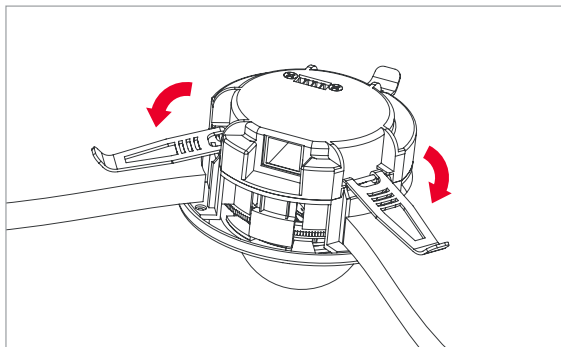

Surface Mount

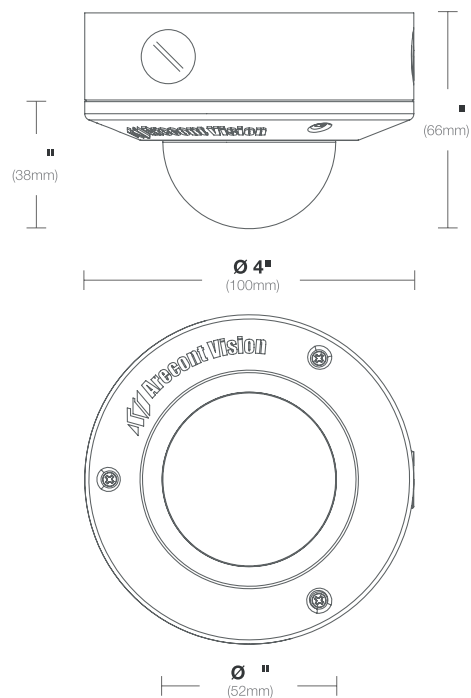

See Next Page for Ordering Information



Model Numbers

1.2MP	AV1555DN-F	NightView	AV1555DN-F-NL	NightView
	AV1555DN-S	NightView	AV1555DN-S-NL	NightView
	AV1555DNIR-S	NightView	AV1555DNIR-S-NL	NightView
1080p	AV2555DN-F		AV2555DN-F-NL	
	AV2555DN-S		AV2555DN-S-NL	
	AV2555DNIR-S		AV2555DNIR-S-NL	
	AV2556DN-F	WDR	AV2556DN-F-NL	WDR
	AV2556DN-S	WDR	AV2556DN-S-NL	WDR
	AV2556DNIR-S	WDR	AV2556DNIR-S-NL	WDR
3MP	AV3555DN-F		AV3555DN-F-NL	
	AV3555DN-S		AV3555DN-S-NL	
	AV3555DNIR-S		AV3555DNIR-S-NL	
	AV3556DN-F	WDR	AV3556DN-F-NL	WDR
	AV3556DN-S	WDR	AV3556DN-S-NL	WDR
	AV3556DNIR-S	WDR	AV3556DNIR-S-NL	WDR
5MP	AV5555DN-F		AV5555DN-F-NL	
	AV5555DN-S		AV5555DN-S-NL	
	AV5555DNIR-S		AV5555DNIR-S-NL	

Model Specific Features

Model	Resolution	Frame Rate*	Features		
AV1555DN	1.2MP	37fps	-	-	NightView™
AV2555DN	1080p	30fps	-	Casino Mode™	-
AV2556DN	1080p	30fps	WDR	-	-
AV3555DN	3MP	21fps	-	-	Binning
AV3556DN	3MP	21fps	WDR	-	Binning
AV5555DN	5MP	14fps	-	-	Binning

* Maximum with H.264 compression

Options

-F	Flush Mount
-S	Surface Mount
IR	IR LEDs
-NL	No Lens

Configurations



Flush Mount (-F)



Surface Mount (-S)



Surface Mount with IR LEDs (-IR-S)


Lens Options (Sold separately)

Model	Focal Length	Horizontal Field of View					
		1.2MP	1080p	1080p WDR	3MP	3MP WDR	5MP
MPM2.1	2.1mm	130°	113°	113°	121°	121°	-
MPM2.8A ¹	2.8mm	95°	83°	83°	89°	89°	113°
MPM4.0A	4mm	67°	59°	59°	63°	63°	80°
MPM6.0	6mm	46°	40°	40°	43°	43°	56°
MPM8.0	8mm	35°	30°	30°	33°	33°	42°
MPM12.0A	12mm	23°	20°	20°	22°	22°	28°
MPM16.0	16mm	17°	15°	15°	16°	16°	20°

Accessories (-S models only)

AV-CRMA	Corner Mount Adapter
AV-JBA ²	Standard Junction Box
AV-PMA	Pole Mount Adapter
MCD-CMT	Pendant Mount with 1/2" NPT Standard for MicroDome® Series
MCD-CRMT	In-room Corner Mount Adapter for MicroDome Series
MCD-EBA	Round Electrical Box Adapter Plate for MicroDome Series
MCD-JBAS	Mount Plate for MicroDome Series for use with AV-JBA
MCD-WMT	Wall Mount with 1/2" NPT Standard for MicroDome Series
MCD-4S	Electrical Box Surface Mount Cover Fits 3rd Party 4-inch Square Box 2-1/8 Inch Deep (e.g. Lowe's® Item # 4788) for MicroDome Series

Create Your Model (Example: AV2556DNIR-S-NL)

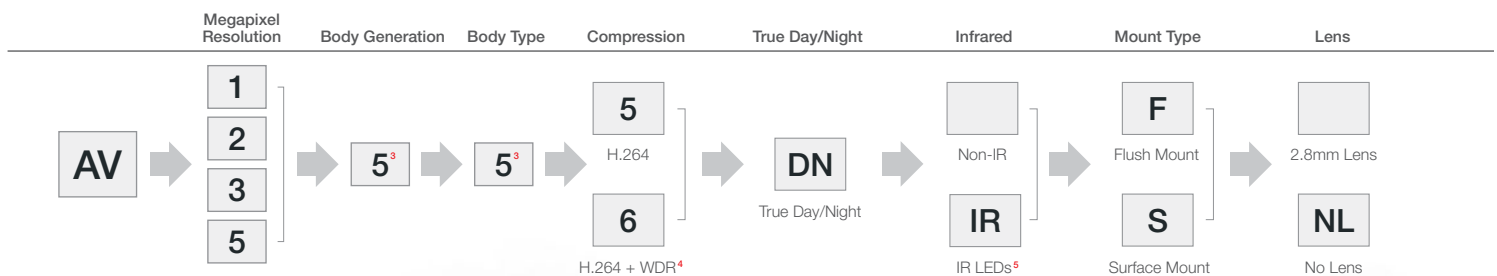

¹ Standard lens for MicroDome G2 except on "-NL" models

² Use with MCD-JBAS

³ "55" represents MicroDome G2 product line

⁴ WDR for AV2556 and AV3556 models only

⁵ Surface mount models only