

MODEL #	VZ-40NL
---------	---------

VIDEO	
Screen Size	40"
Max. Resolution	1920 x 1080 @60Hz
Pixel Pitch	0.46125 mm x 0.46125 mm
Brightness	700cd/m²(Typical)
Contrast Ratio	3000:1
Aspect Ratio	16 : 9
Viewing Angle (H/V)	178° / 178°
Display Color	16.7 Million
Response Time	< 8ms
Video System	NTSC / PAL
Frequency (H)	31 ~ 80KHz
Frequency (V)	56 ~ 75Hz

INTERFACE	
AV(Composite) In/ Out	2 / 2
S-Video In / Out	1 / 1
VGA In(15Pin D-Sub)	1
Component{Y, Pb, Pr, Sound L/R} In	1
DVI In	1
HDMI In	2
RS-232C In/Out	1 / 1
AV(Composite) Sound In/Out (RCA Type)	2 / 2
PC Stereo In/Out	1 / 1

AUDIO	
Built in speaker	7W X 2

SPECIAL FEATURES	
Bezel Width	0.43" / 11 mm
Multi Display Function	PIP / PBP / VOV
Filter Type	3D Comb-filter / De-interlace
Image Retention	YES
Rotate IR receiver	YES
Multi-lingual Language	English, Spanish, French, German, Italian, Portuguese, Dutch

DIMENSIONS & WEIGHT	
Outline Dimension (W x H x D)	36.02" x 21.50" x 3.5" 914.9 mm x 546.01 mm x 89 mm
Net Weight / Gross Weight	55 lbs (25kg) / 64 lbs (29kg)


MOUNT	
VESA	400mm x 200mm x 200mm, M8 x L12 Screws

GENERAL	
Transmitter - IR Remote Control	YES
Power Electrical Ratings	AC100 ~ 240V(50/60Hz)
Consumption	180 W
Warranty Parts/ Labor	3 Year / 3 Year
MTBF (Approx.)	50,000 Hours
Operating Temperature	32 - 104°F / 0 - 40°C
Compatible Mounts WALL	VZ-XM46, VZ-WM71
CEILING	VZ-CMKIT-04


VZ-40NL ADVANTAGES

- 40" 1080p CCTV LED Monitor
- Narrow 11mm Metal Bezel
- Video Wall Construction - Active to Active Bezel Width 22 mm
- OSD Function Control through RS-232C protocol
- Digital & Analog Inputs, 3-Year Warranty
- Image Rotation Feature Prevents "Pixel Burn-In"

DIMENSIONS

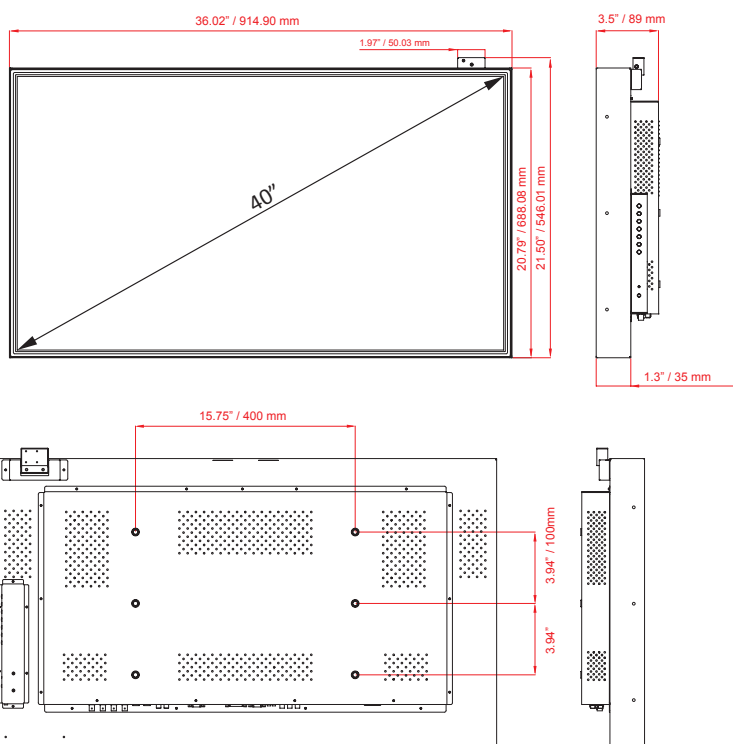

INTERFACE

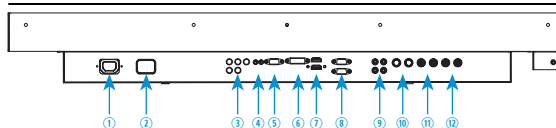

- | | | |
|---------------------------|-------------------------------------|---------------------------|
| 1. AC110V IN | 6. DVI IN | 10. S-VIDEO IN/OUT |
| 2. AC110V OUT | 7. HDMI1 / HDMI2 IN | 11. AV(composite)1 IN/OUT |
| 3. COMPONENT IN | 8. RS-232C IN/OUT | 12. AV(composite)2 IN/OUT |
| 4. AUDIO OUT/PC STEREO IN | 9. AV(composite) SOUND IN/OUT (RCA) | |
| 5. VGA IN | | |

Contact ViewZ

- Address : 177 W. Orangethorpe Ave., Placentia, CA 92870
- Phone : (714) 996-1177, Fax : (714) 996-1138
- Sales : sales@viewzusa.com
- Specification subject to change without notice.