

## Trove1HW1R

### Access & Power Integration Solution

#### Description

Altronix Trove™ rack enclosure and backplane let you easily integrate Altronix power with Honeywell access controllers and accessories. Trove simplifies board layout and wire management, reduces installation time and labor costs.



Trove1HW1R

**Honeywell**

#### Trove1R Enclosure + THW1R Backplane Features

- Accommodates the following Honeywell controllers with or without Altronix power/accessories:
  - Up to four (4) PRO32E1PS, PRO32IC, PRO32R2, PRO32IN, PRO32OUT, PW6K2E2PS, PW6K1IC, PW6K1IN, PW6K1OUT, PW6K1R2.
  - One (1) PRO32E1PS or PW6K2E2PS.
- Altronix Power Supplies;
- Altronix Sub-Assemblies.
- Includes Altronix Trove1R Rack Enclosure and one (1) removable THW1R backplane.

#### Agency Listings

CE European Conformity.

#### Features

- Power status LED for use where power and access control boards share the same enclosure.
- Simplifies board layout and wire management.
- Convenient knockout configuration:
  - Six (6) 1.25" diameter knockouts located on the back of enclosure.
- 2U drawer on extendable rails.
- Included Z Bracket facilitates ease of wiring.
- Black powder coated steel enclosure.
- Includes cam lock, tamper switch, IEC320 connector and mounting hardware.



#### Dimensions (H x W x D):

Modular 2U standard EIA 19" rack mount chassis.  
3.25" x 19.0" x 26.5" (82.6mm x 482.6mm x 673.1mm).

#### Weights:

Product - 18 lbs. (8.16 kg)  
Shipping - 23 lbs. (10.43 kg)

#### THW1R Backplane Optional Mounting Configurations

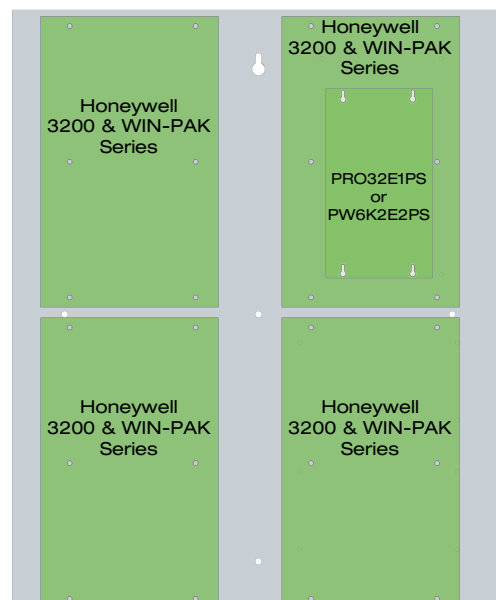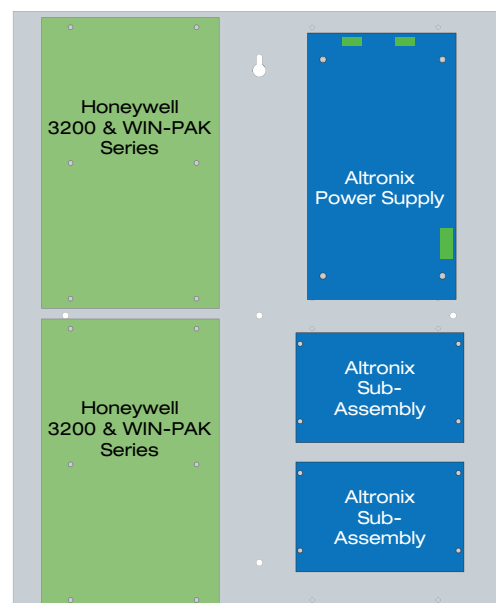

#### Optional Accessories

##### RE2:

Rack Mount Battery Enclosure accommodates up to four (4) 12VDC/7AH batteries.

##### WM5, WM25, WM100:

Magnetic Cable Tie Mounts (5, 25, 100 counts).

##### LC3:

6 ft. three-wire line cord.



## Trove1HW1R Access & Power Integration Solution

