


DS-2CE16C2N-IT3
720 TVL Picadis EXIR Bullet Camera



Key Features

- 1/3" Picadis
- 1.3 MP Sensor, 1280 x 960 Effective Pixels
- True Day/Night
- 720 TVL Horizontal Resolution
- 40 Meters IR Range
- Smart IR
- IP66 Weatherproof
- Wide Operating Temperature Range

Dimensions

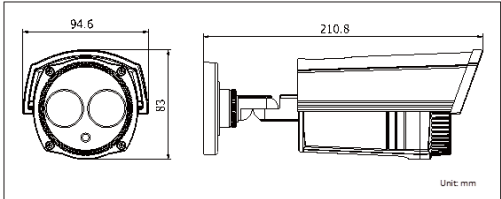

Order Model

DS-2CE16C2N-IT3

	DS-2CE16C2N-IT3
Camera	
Image Sensor	1/3" Picadis
Signal System	NTSC
Effective Pixels	1280 x 960
Minimum Illumination	Color: 0.34 @ f/2.2; B/W: 0 with IR
Shutter Speed	NTSC: 1/30 s to 1/30,000 s
Lens	3.6 mm (2.8 mm, 6 mm, 8 mm, 12 mm, 16 mm optional)
Lens Mount	M12
Day/Night	IR cut filter with auto switch
Horizontal Resolution	720 TVL
Synchronization	Internal synchronization
Video Output	1 Vp-p composite output (75 Ω/BNC)
S/N Ratio	More than 62 dB
General	
Working Temperature/ Humidity	-40° C to 60° C (-40° F to 140° F) Humidity 90% or less (non-condensing)
Power	12 VDC
Power Consumption	Maximum 5 W
Ingress Protection	IP66
IR Range	40 meters
Dimensions	94.6 mm × 83 mm × 210.8 mm (3.72" × 3.27" × 8.30")
Weight	700 g (1.54 lbs)