



**SD9366-EH**

**SD9366-EHL**

Speed Dome Network Camera

1080p 60 fps • 30x Zoom • 150M/250M IR • IP66 • IK10 •  
NEMA 4X • -40°C ~ 55°C • Wiper

The SD9366-EH/EHL is the latest professional speed dome camera with wiper from VIVOTEK, specifically designed to enhance low light surveillance in large coverage areas. Equipped with 250M/150M IR illuminators and a 30x optical zoom lens, the SD9366-EH/EHL provides a superb low light image in the most challenging situations. The camera also adopts VIVOTEK's latest IR technology, VAIR (Vari-Angle IR). VIVOTEK's VAIR provides smooth vari-angle adjustment of the IR illuminators, allowing broad coverage FOV and highly uniform IR intensity while avoiding hot-spots traditionally associated with IR illumination.

The SD9366-EH/EHL is the PTZ surveillance camera with IR Illumination to utilize H.265 compression technology. When combined with VIVOTEK's Smart Stream II technology users can obtain bandwidth savings of up to 80%\* compared to traditional H.264. By combining 1080p full HD resolution with H.265, IR


illuminators, VAIR, WDR, and 30x optical zoom, the SD9366-EH/EHL is able to capture fine details at top-notch quality, 24 hours a day, 7 days a week.

VIVOTEK further strengthened the camera performance with an IP66- and NEMA 4X-rated housing to protect the camera against rain, dust, and corrosion. The SD9366-EH/EHL has a wide operating temperature range from -40°C to 55°C, ensuring continuous operation under the most extreme weather conditions and hazardous environments. This makes the SD9366-EH/EHL ideally suited to monitor wide open spaces such as ports, highways, cities, and parking lots where high-level precision is required.

\* Depending on scene.

## Key Features

- Real-time H.265, H.264 and MJPEG Compression (Triple Codec)
- 60 fps @ 1080p Full HD
- 30x Zoom Lens
- 150M/250M IR with VAIR (Vari-Angle IR)
- WDR Pro for Unparalleled Visibility in High Contrast Environments
- Weather-proof IP66, Vandal-proof IK10 and NEMA 4X-rated Housing
- -40°C ~ 55°C Wide Temperature Range for Extreme Weather Conditions
- Smart Stream II to Optimize Bandwidth Efficiency
- EIS
- Easy Cleaning with Built-in Wiper

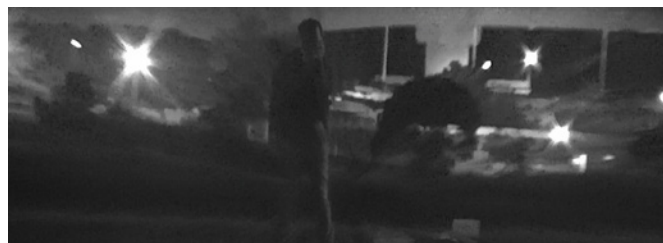

Without VAIR



With VAIR

## Technical Specifications

Model	SD9366-EH: 250M VAIR SD9366-EHL: 150M VAIR	S/N Ratio	SD9366-EH: 62 dB SD9366-EHL: 54 dB
<b>System Information</b>		Dynamic Range	SD9366-EH: 120 dB SD9366-EHL: 110 dB
CPU	Multimedia SoC (System-on-Chip)	Video Streaming	Adjustable resolution, quality and bitrate Smart Stream II
Flash	128MB	Image Settings	Adjustable image size, quality and bit rate; Time stamp, text overlay, flip & mirror; Configurable brightness, contrast, saturation, sharpness, white balance, exposure control, gain, backlight compensation, privacy masks (Up to 24); Scheduled profile settings, defog, 3DNR, EIS, HLC
RAM	512MB	<b>Audio</b>	
<b>Camera Features</b>		Audio Capability	Two-way Audio
Image Sensor	SD9366-EH: 1/2.8" Progressive CMOS SD9366-EHL: 1/3" Progressive CMOS	Compression	G.711, G.726
Max. Resolution	1920x1080	Interface	External microphone input External line output
Lens Type	30x Optical Zoom, Auto Focus	<b>Network</b>	
Focal Length	f = 4.3~129 mm (30x zoom)	Users	Live viewing for up to 10 clients
Aperture	F1.6 ~ F4.7	Protocols	IPv4, IPv6, TCP/IP, HTTP, HTTPS, UPnP, RTSP/ RTP/RTCP, IGMP, SMTP, FTP, DHCP, NTP, DNS, DDNS, PPPoE, CoS, QoS, SNMP, 802.1X, UDP, ICMP, ARP, TLS, NTCIP
Iris type	DC-Iris	Interface	10 Base-T/100 Base-TX Ethernet (RJ-45) *It is highly recommended to use standard CAT5e & CAT6 cables which are compliant with the 3P/ETL standard.
Field of View	2.3° ~ 64° (Horizontal) 1.3° ~ 36° (Vertical) 2.6° ~ 73° (Diagonal)	ONVIF	Supported, specification available at <a href="http://www.onvif.org">www.onvif.org</a>
Shutter Time	SD9366-EH: 1 sec. to 1/10,000 sec. SD9366-EHL: 1/8 sec. to 1/30,000 sec.	<b>Intelligent Video</b>	
WDR Technology	WDR Pro	Video Motion Detection	Five-window video motion detection
Day/Night	Yes	Auto-Tracking	Auto-tracking on moving object
Removable IR-cut filter	Yes	<b>Alarm and Event</b>	
IR Illuminators	SD9366-EH: Built-in IR Illuminators up to 250 meters with VAIR, IR LED*2 SD9366-EHL: Built-in IR Illuminators up to 150 meters with VAIR, IR LED*2	Alarm Triggers	Motion detection, manual trigger, digital input, periodical trigger, system boot, recording notification, camera tampering detection, audio detection
Minimum Illumination	SD9366-EH: 0.07 Lux @ F1.6 (Color) 0.01 Lux @ F1.6 (B/W) 0 Lux with IR illumination on SD9366-EHL: 0.42 Lux @ F1.6 (Color) 0.01 Lux @ F1.6 (B/W) 0 Lux with IR illumination on	Alarm Events	Event notification using digital output, HTTP, SMTP, FTP, NAS server and Micro SD card File upload via HTTP, SMTP, FTP, NAS server and Micro SD card
Pan Speed	0.1° ~ 300° / sec	<b>General</b>	
Pan Range	360° endless	Connectors	RJ-45 cable connector for Network 10/100 Mbps PoE connection*1 Audio input*1 Audio output*1 AC/DC 24V power input*1 Digital input*4 Digital output*2 RS-485 for PTZ control (PelcoD protocol, Baud rate 2400)*1
Tilt Speed	0.1° ~ 300° / sec	LED Indicator	System power and status indicator
Tilt Range	220° (-110° ~ +110°)	Power Input	PoH/PoE (95W) AC/DC 24V
Preset Locations	256 preset locations 128 presets per tour	Power Consumption	PoH/PoE (95W): Max. 70 W (Heater on) Max. 39 W (Heater off) AC/DC 24V: Max. 96 W (Heater on) Max. 45 W (Heater off)
Pan/Tilt/Zoom Functionalities	SD9366-EH: 48x digital zoom (4x on IE plug-in, 12xbuilt-in), Auto pan mode, Auto patrol mode SD9366-EHL: 128x digital zoom (4x on IE plug-in, 32x built-in), Auto pan mode, Auto patrol mode		
On-board Storage	Slot type: Micro SD/SDHC/SDXC card slot Seamless Recording		
<b>Video</b>			
Compression	H265, H264, MJPEG		
Maximum Frame Rate	H.265 & H.264: 60 fps @ 1920x1080 MJPEG: 30 fps @ 1920x1080		
Maximum Streams	4 simultaneous streams		

## Technical Specifications

Dimensions	236.45 x 364.2 mm
Weight	5,700 g
Casing	IP66, IK10, NEMA 4X
Safety Certifications	CE, FCC Class A, VCCI, C-tick, NEMA 4X, UL
Operating Temperature	Starting Temperature: -40°C ~ 55°C (-40°F ~ 131°F) Working Temperature: -40°C ~ 55°C (-40°F ~ 131°F)
Humidity	90%
Warranty	36 months


### System Requirements

Operating System	Microsoft Windows 8/7
Web Browser	Mozilla Firefox 7~43 (streaming only) Internet Explorer 10/11
Other Players	VLC: 1.1.11 or above Quicktime: 7 or above

















### Included Accessories

CD	User's manual, quick installation guide, Shepherd, VAST
Others	Wall mount bracket, screws, waterproof connectors, terminal blocks, quick installation guide, warranty card, alignment sticker, ground wire, T25 stardriver, software CD, desiccant bags, I/O cable

### Dimensions



## Compatible Accessories

Mounting Kits		Others	
	<b>AM-529</b> Mounting Adapter		<b>AJ-001</b> USB Joystick
			<b>AJ-002</b> USB Joystick
Cabinet			
	<b>AT-CAS-001</b> Cabinet for Speed Dome		<b>AT-CAB-002</b> Cabinet for HLG Power Supply
	<b>AT-SUN-002</b> Sunshield		<b>AT-SWH-000</b> Power Safety Kit
			
PoE Kit			
24VAC			
	<b>AA-351</b> Outdoor Power Box, 24VAC/144W, IP67, IK10		<b>AA-352</b> Outdoor Power Box, 24VAC/144W, IP67, IK10
95w PoH/PoE			
	<b>AW-IHH-0100</b> Industrial 1xGE 95W PoH/PoE Injector		<b>HLG-120H-54</b> Industrial 54VDC/120W Power Supply, IP67
	<b>AW-IHH-0200</b> Industrial 1xGE 95W PoH/PoE + 1x SFP GE Switch		<b>HLG-120H-54</b> Industrial 54VDC/120W Power Supply, IP67
			<b>AP-GIC-010A-095</b> 95W PoH/PoE Injector