


PACKAGE CONTENTS

* 1x IR unit	1x screw pack
* 1x standard U bracket	

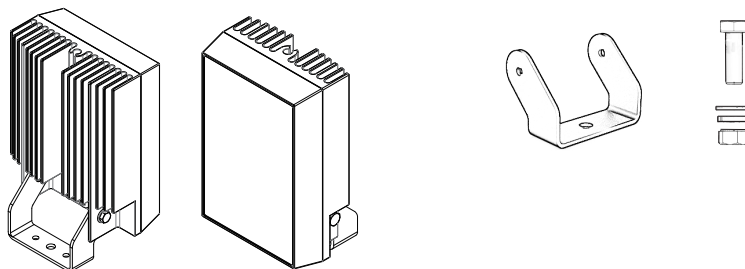

SPECIFICATIONS:

Power input: 24V AC or 12~24V DC (AI-104 series), 24V AC or 24V DC (AI-105-010). Max. consumption is 24W (AI-104 series), 48W (AI-105-010).



IR angle:

10° - 100m	AI-104-010	10° - 200m	AI-105-010
25° - 50m	AI-104-025		
35° - 25m	AI-104-035		

Listed below is the color scheme for wires coming from the IR light units.

Description	Color	Gauge
IR status DO-	Orange	(26AWG)
IR status DO+	Brown	(26AWG)
LED ON/OFF mode DO-	Black	(26AWG)
LED ON/OFF mode DO+	Red	(26AWG)
Input(V-): 24V AC/DC or 12V DC	Orange	(20AWG)
Input(V+): 24V AC/DC or 12V DC	Brown	(20AWG)
Output(V-): Volts same as input	Black	(20AWG)
Output(V+): Volts same as input	Red	(20AWG)

You may need to connect the LED ON/OFF mode DO signal lines to camera in order to synchronize the IR cut filter operation.



All specifications are subject to change without notice.
Copyright © 2015 VIVOTEK INC. All rights reserved.

VIVOTEK INC.

6F, No.192, Lien-Cheng Rd., Chung-Ho, New Taipei City, 235, Taiwan, R.O.C.
T: +886-2-82455282 | F: +886-2-82455532 | E: sales@vivotek.com

VIVOTEK USA, INC.

2050 Ringwood Avenue, San Jose, CA 95131
T: 408-773-8686 | F: 408-773-8298 | E: salesusa@vivotek.com

VIVOTEK Europe

Randstad 22-133, 1316BW Almere, The Netherlands
T: +31(0)36-5298-434 | E: saleseurope@vivotek.com