

12 CH Full HD Video Wall Processor



VZ-PRO-12 ADVANTAGES

- Up to 12 Full HD video inputs and outputs
- Simultaneous 1080p video playback support
- Spectacular Ultra HD(4K) support for outstanding visual experiences
- Content management software
- Designed to operate 24/7/365 in mission-critical installations
- Industrial grade high-performance systems based on Intel® Xeon® CPU Windows® 7 Professional
- Max bit rate - 300Mbps (12 channel)


MODEL #	VZ-PRO-12
SPECIFICATIONS	
Processor	Intel® Xeon® E5 series processor
Storage	SSD 256GB x 2
RAM	8GB DDR ECC (option: 16GB available)
Graphic	2 x VIA uH8 PCI-E graphics card
RESOLUTION	
Per Channel / Display	Up to 1920 x 1080
INTERFACE	
DVI (uD8) Input	12 ea
HDMI (DMS-59) Output	12 ea (DVI Option)
USB 3.0	2 ea
USB 2.0	2 ea
Serial Port	1 ea
Network (RJ-45)	2 ea - 10/100/1000 Base-T
MEDIA SUPPORT	
Video Codec	H.264, MPEG-4, VC-1, WMV9
Video File Format	WMV, AVI, MKV, ASF, FLV, MOV
Image File Format	JPEG, BMP, PNG, TIFF
GENERAL	
Power Supply	2 x 920W PSU; Power Input: 100 - 240V AC
Operating Temperature	41 ~ 95°F / 5 °C ~ 35°C
Operating Humidity	10 % ~ 90 % (Non-condensing)
Dimensions (W x D x H)	17.2" x 25.5" x 5.2" / 437 x 648 x 132 mm
Net Weight	54.4 lbs / 24.67 Kg

Contact ViewZ


- Address : 177 W. Orangethorpe Ave., Placentia, CA 92870
- Phone : (714) 996-1177, Fax : (714) 996-1138
- Sales : sales@viewzusa.com
- Specification subject to change without notice.

PRO-12 CONNECTION DIAGRAM

LED Video Wall Solution
UNBS, EHB & ENB Series

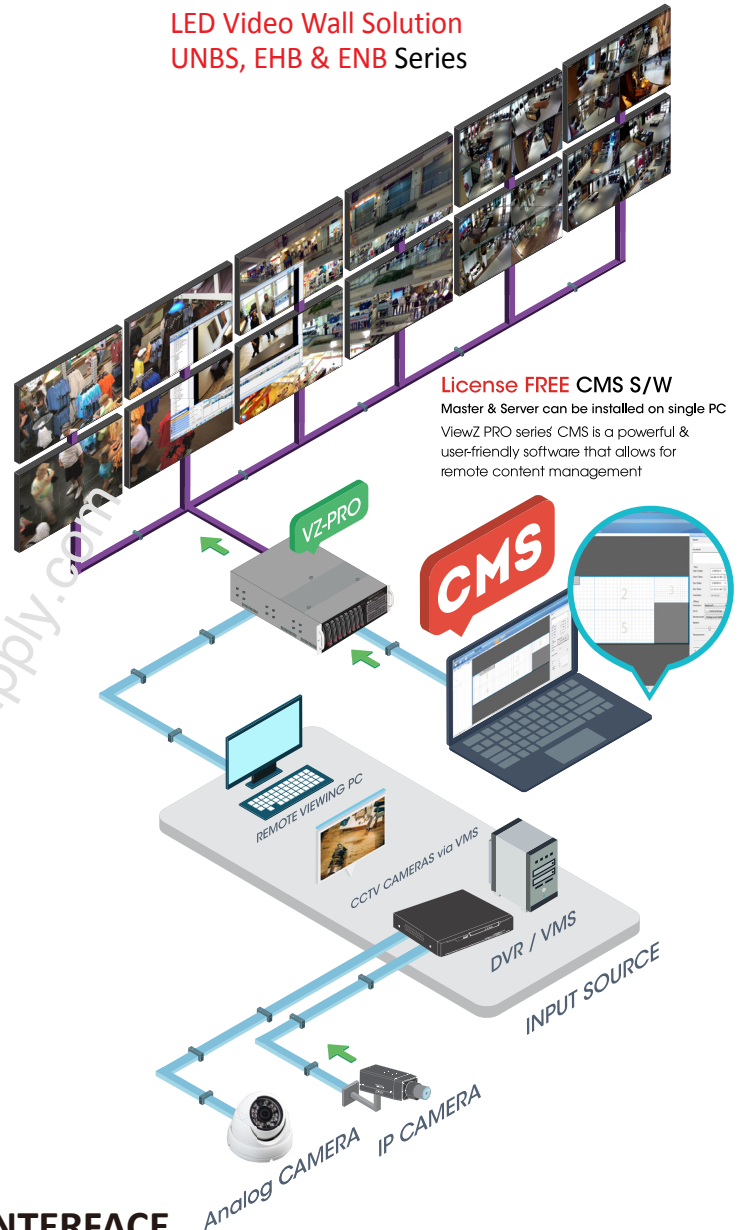

INTERFACE

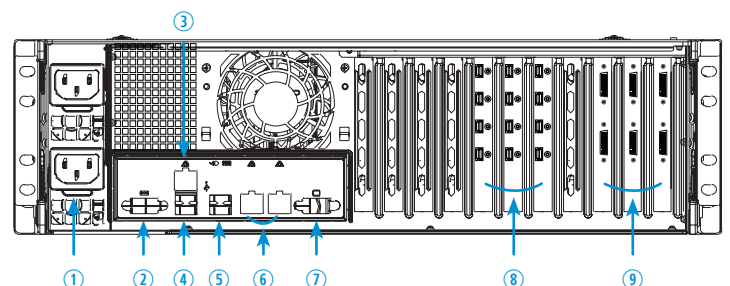

1. AC 110V IN (Dual Power)
2. RS 232
3. ETHERNET(RJ-45) IN
4. 2 x USB 3.0
5. 2 x USB 2.0
6. 2 x ETHERNET(RJ-45) IN
7. VGA IN
8. uD8 Out (HDMI)
9. DIGITAL IN